

HOME PRODUCTS TECHNICAL GUIDE

CONTENTS

PERFORMANCE	PAGE 2
WARRANTIES	PAGE 2
SECTION 1:	PAGES 3 – 11
CARTECK SECTIONAL GARAGE DOORS	
CARTECK SLX VISION SECTIONAL GARAGE DOORS	
CARTECK GSA VISION SECTIONAL GARAGE DOORS	
CARTECK SUPERSIZE SECTIONAL GARAGE DOORS	
SECTION 2:	PAGES 12 – 14
CARTECK SIDE HINGED GARAGE DOORS	

WHAT PERFORMANCE CAN I EXPECT?

As Part of the CE marking process, each product must have its performance provided for a defined set of characteristics. Other characteristics can also be included if relevant to a door's performance, such as security. The following table shows the performance characteristics of each product in our range.

NPD signifies the product has not been measured for this characteristic (NPD – No Performance Determined)

PERFORMANCE CHARACTERISTIC	CarTeck Sectional Garage Doors	CarTeck Super Size Sectional Garage Doors	CarTeck Sectional GSA Vision Garage Doors	CarTeck Sectional SLX Vision Garage Doors	CarTeck Side Hinged Garage Doors
Resistance to Windload EN 12424	Class 2	Class 2	Class 2	Class 2	Class 2
Watertightness EN 12425	Class 2	Class 2	Class 2	Class 2	NPD
Air Permeability EN 12426	Class 2	Class 2	Class 2	Class 2	NPD
Thermal Transmittance EN 13241	1.38 W/m²k	1.38 W/m²k	3.3 W/m²k	3.5 W/m²k	NPD
Operating Forces (hand Operated) EN 12604	150 N	150 N	150 N	150 N	NPD
Operating Cycles EN 1191	NPD	NPD	NPD	NPD	NPD

WARRANTY

The warranty periods below only apply to products that have been correctly installed as per the instructions and have been used, maintained by a Garage Door Specialist and cleaned in accordance with the requirements set out in the operating and maintenance sections of instructions and labels.

CARTECK, SUPER SIZE, GSA VISION & SLX VISION SECTIONAL GARAGE DOORS

2-year manufacturer's guarantee

- on polymer and aluminium window units

5*-year manufacturer's guarantee

- on SLX & GSA Vision windows, rollers, hinges, cable pulleys, cables and standard springs (opening/closing max. 5 times a day)

10-year manufacturer's guarantee

- on panels against rust penetration from inside to outside
- against door panel separation of steel from foam
- on material and manufacturing flaws of all non-moving parts of the frame that are verifiably unusable or whose usability is substantially compromised
- on floor seal, intermediate seals, side seals and lintel seal against rotting

The guarantee does not apply to doors that are subjected to extreme conditions, e.g. corrosive influences resulting from use in a coastal climate with high salt content.

***2 -year for Super Size**

CARTECK SIDE HINGED GARAGE DOORS

2-year manufacturer's guarantee

- on window units, hinges, locks, handles and stays (opening/closing max. 5 times a day)

10-year manufacturer's guarantee

- on panels against rust penetration from inside to outside
- against door panel separation of steel from foam
- on material and manufacturing flaws of all non-moving parts of the frame that are verifiably unusable or whose usability is substantially compromised
- on floor seal, intermediate seals and frame seals against rotting

The guarantee does not apply to doors that are subjected to extreme conditions, e.g. corrosive influences resulting from use in a coastal climate with high salt content.

CARTECK DRIVE & MOTOR

*5-year manufacturer's guarantee

- on mechanical defects, material and manufacturing flaws. (opening/closing max. 5 times a day)**

*1 -year for Super Size

** Consumable Items are not included within warranty terms and conditions: hand transmitters, light bulbs, fuses & batteries.

SECTION 1:

CARTECK SECTIONAL GARAGE DOORS

CARTECK SLX VISION SECTIONAL GARAGE DOORS

CARTECK GSA VISION SECTIONAL GARAGE DOORS

CARTECK SUPERSIZE SECTIONAL GARAGE DOORS



TECHNICAL CARTECK SECTIONAL GARAGE DOORS GSW 40-L & GSA/SLX VISION

DIMENSIONS

ORDERING SIZES = DRIVE THROUGH SIZES

Observe the following measurement details to guarantee exact assembly and precise, reliable operation of CarTeck sectional garage doors.

120mm

For depth see table "Overall length CarTeck motor"

For depth see table "Horizontal track lengths"

120

500

Ordering dimension = H = clearance height

170

500

800

140

195

170

82,5

75

82,5

Min. garage width = clearance width + 165

Ordering dimension = B = clearance width

Ordering dimension = H = clearance height

Ordering dimension = B = clearance width

The clearance height corresponds to the distance from the upper edge of the floor to the lower edge of the header.

When planning, please consider the distance will be reduced due to the application of screed or asphalt.

INSIDE

RECOMMENDED HORIZONTAL TRACK FIXING POINTS

If the rear spacer bar extending side fixings are securely fixed, the second fixing point, shown within is not required.

= recommendation fixing points

2742 mm

700

1050

383,5

horizontal-frame

Insertion depth: 2742 mm

spring duct length: 2344 mm

3130 mm

1000

1200

383,5

horizontal-frame

Insertion depth: 3130 mm

spring duct length: 2732 mm

3610 mm

1765

1200

383,5

horizontal-frame

Insertion depth: 3610 mm

spring duct length: 3212 mm

Need shorter horizontal tracks? There is some scope for cutting down the horizontal tracks - contact the Sales office for advice.

ORDERING NOTES:

Door heights achieved by mixing panel heights (except ribbed), use of 0, 9, 17, or 32mm bottom profiles or top & bottom panel cut downs.

When ordering use metric sizes, imperial conversions are nominal.

Frame holes & fixing brackets

Height	2084	2134	2235	2286	2388	2438	2591	2743	3048	3353	3658	3962	4216	4267	4420	4572	4877	5182	5500	Height
3000																				3000
2875																				2875
2750																				2750
2625																				2625
2500																				2500
2375																				2375
2250																				2250
2204																				2204
2175																				2175
2125																				2125
2084																				2084
2050																				2050
2000																				2000
1925																				1925
1875																				1875

Requires frame leg holes (standard frame) and twist fix frame leg brackets.

Twist fix frame leg brackets not required, but provided to assist with installation*.

No holes in frame leg as an option (between fix frame with stiffener brackets required).

Twist fix frame leg brackets required.

No holes in frame leg as an option (between fix frame with stiffener brackets required).

Standard frame leg hole position from edge of frame leg (seal side) to centre of fixing holes = 55mm.

*Doors below 70kg do not require twist fix brackets for strengthening, however they are included with all doors to assist with installation. They can be used outboard of the frame to locate a secure fixing when inbound fixing is not possible or sufficiently solid.

HORIZONTAL TRACK LENGTHS

Allow 115mm headroom. Use standard lifting gear. Allow 140mm headroom above trays only. Gear uses twin springing & commercial roller spindles

Height	2084	2134	2235	2286	2388	2438	2591	2743	3048	3353	3658	3962	4216	4267	4420	4572	4877	5182	5500	Height
3000																				3000
2875																				2875
2750																				2750
2625																				2625
2500																				2500
2375																				2375
2250																				2250
2204																				2204
2175																				2175
2125																				2125
2084																				2084
2050																				2050
2000																				2000
1925																				1925
1875																				1875

3610mm

3130mm

2742mm

Horizontal tracks can be reduced on request for £167. Speak to the CarTeck sales office for limitations.

GSW 40-L Sectional door

DOOR:

Sectional door double skinned PUR foam core, 40mm thick CarTeck panels. Outer surface finished in choice of 4 standard designs and all standard listed CarTeck colours. Inner surface stucco design, colour similar to RAL 9002. Sections have a centre seal; EPDM, header, and floor seals. Different order heights are made up from mixing panel sizes, 4 different bottom profile sizes and reduced top panel heights.

FRAME:

Door frame is made from galvanized sheet steel, coil coated with polyester, prime coated similar to RAL 9016 or other Trend colour. Protective strips with EPDM sealing lips on both sides of the vertical tracks.

HARDWARE:

Galvanised finish, screwed hinges to all sections, adjustable rollers with ball bearings. Multiple tension springs and double cable system housed in low friction housing above horizontal tracks.

AUTOMATION:

Door prepared for automation as standard with manual locking available as optional extra.

COLOURS

RAL/BS references for colours are provided as a guide only to the nearest similar RAL/BS colour. Colours will not match to other RAL/BS finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL/BS or other colours will not be a precise match.

The door panel, frames and window frame colour shade, and surface lustre will show some slight variation, this is due to different base materials and coating methods.

GSA / SLX Vision Sectional door

DOOR:

Sectional door panels made from hollow aluminium profiles, 40mm depth filled with 16mm scratch resistant, polymer double glazing. Sections have a centre seal; EPDM, header, and floor seals. Door heights are achieved by equal division of panel heights ranging from 300mm to 750mm.

FRAME.

Door frame is made from galvanized sheet steel, coil coated with polyester, prime coated similar to RAL 9016 or other Trend colour. Protective strips with EPDM sealing lips on both sides of the vertical tracks.

HARDWARE:

Hardware, galvanised finish, screwed hinges to all sections, adjustable rollers with ball bearings. Multiple tension springs and double cable system housed in low friction housing above horizontal tracks.

AUTOMATION:

Door prepared for automation as standard.

COLOURS

RAL references for colours are provided as a guide only to the nearest similar RAL colour. Colours will not match to other RAL finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL BS or other colours will not be a precise match.


The door panel, frames and window frame colour shade, and surface lustre will show some slight variation, this is due to different base materials and coating methods.

OPERATOR RAIL FOR CARTECK 260/70/80 & 360/370/380

Turning motor head through 90 degrees reduces overall length: 200 series -133mm 300 series -18mm

Carteck 260 / 360								Carteck 270 / 370				Carteck 280 / 380									
		Width																			
Height	2084	2134	2235	2286	2388	2438	2591	2743	3048	3353	3658	3962	4216	4267	4420	4572	4877	5182	5500	Height	
3000	4296mm																				3000
2875	4296mm																				2875
2750	4296mm																				2750
2625	4296mm																				2625
2500	3536mm																				2500
2375	3536mm																				2375
2250	3536mm																				2250
2204	3536mm																				2204
2175	3536mm																				2175
2125	3536mm																				2125
2084	3286mm																				2084
2050	3286mm																				2050
2000	3286mm																				2000
1925	3286mm																				1925
1875	3286mm																				1875
Height	2084	2134	2235	2286	2388	2438	2591	2743	3048	3353	3658	3962	4216	4267	4420	4572	4877	5182	5500	Height	
Width																					

NO HOLES FRAME FIXING




IMPORTANT !

When fixing a no-holes frame between the reveal you must secure the frame to the lintel as shown using the 'L' bracket supplied.


If a good fixing cannot be achieved, alternative fixing methods must be used to secure the frame.



CARTECK DRIVE 500 / 600 DIMENSIONS

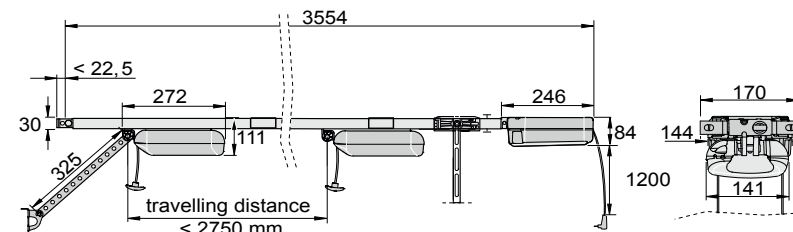

CARTECK DRIVE PRO 500 / 600 DIMENSIONS

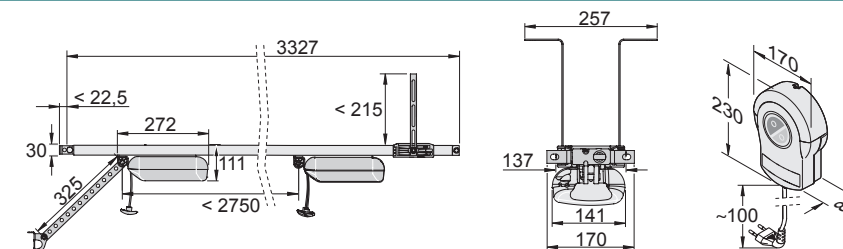

OPERATOR RAIL FOR CARTECK DRIVE & DRIVE PRO

Height	2084	2134	2235	2286	2388	2438	2591	2743	3048	3353	3658	3962	4216	4267	4420	4572	4877	5182	5500	Height
3000																				3000
2875																				2875
2750																				2750
2625																				2625
2500																				2500
2375																				2375
2250																				2250
2204																				2204
2175																				2175
2125																				2125
2084																				2084
2050																				2050
2000																				2000
1925																				1925
1875																				1875
Height	2084	2134	2235	2286	2388	2438	2591	2743	3048	3353	3658	3962	4216	4267	4420	4572	4877	5182	5500	Height

3D PROFILE KITS

3D profile kits These profile kits not only provide a neat solution for covering frame holes on standard frames but also allow gaps to be bridged and overlap onto the opening face to neaten up edges. The profiles are supplied in 3m lengths for on-site cutting to size. Doors >3m will require a butt joint on the header, for a seamless header choose the 850r 120mm 3D frame leg kit and additional header.

The kits:



85mm frame leg kit	2no. 85mm x 12mm x 3000mm
85/120mm 3D profile kit	2no. 85mm x 12mm x 3000mm 1no. 120mm x 12mm x 3000mm
120mm 3D profile kit	3no. 120mm x 12mm x 3000mm
*85mm frame leg kit & additional door header	2no. 85mm x 12mm x 3000mm (The additional door header will be supplied to the door ordering size +200mm)
*120mm frame leg kit & additional door header	2no. 120mm x 12mm x 3000mm (The additional door header will be supplied to the door ordering size +200mm)

70mm angle 3D kit 3no. 70mm x 12mm x 3000mm



* For doors over 3 metres wide – additional door header eliminates the join that would occur using a 120mm 3D profile (max length 3 metres)

85mm frame leg 3D profile kit

85mm frame leg 3D cover profiles for between the reveal fit with lateral movement for up to 30mm gap coverage or up to 30mm overlap.





Note: The frame leg 3D kit profiles are 12mm deep and will create a step at the header. Use an 85/120 3D profile kit for a flush finish.





85mm/120mm 3D profile kit

Also available in a kit with a 120mm header 3D cover profile.





120mm 3D profile kit

120mm 3D cover profiles for between the reveal fit at the front edge with lateral movement for up to 65mm overlap.

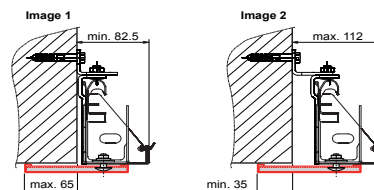


The 3D profiles have a smart fixing that allows for lateral movement – perfect for bridging small fitting gaps or tidying up the front face of the opening.

Shown here on the 85mm 3D profile.

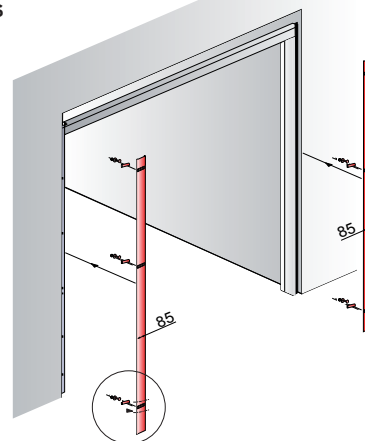


3D profile smart fixing bracket 85 mm

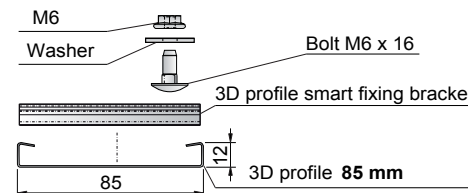



85/120mm 3D frame leg kit & additional door header

Perfect for doors over 3000mm wide – our 120mm 3D profile comes in 3000mm lengths requiring a butted joint on the header for larger doors – this kit includes a second full-width single piece header for a seamless finish. Choose kits with either 85mm or 120mm frame legs.

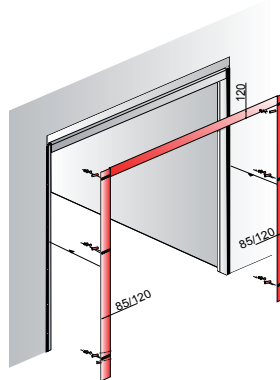

70mm angle 3D renovating profile

Use this when fitting behind the reveal or part between to neaten up damaged openings. The 70mm angle 3D renovating profile is held between the frame and the brickwork and will cover the back corner of the opening to tidy up any damaged wall edges. Ideal when removing timber frame and brick work deteriorated. Supplied in 3000mm lengths for on-site cutting to the required length.

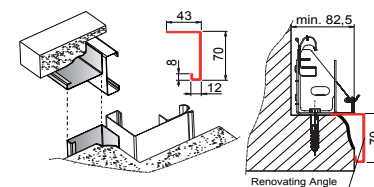

POLYMER WINDOWS

CARTECK SECTIONAL GARAGE DOORS GSW 40-L

WINDOWS - POLYMER DOUBLE GLAZING Polymer casement with polymer (Styrene Acrylonitrile) double glazed unit.

Standard Rib, Centre Rib & Solid

Georgian

Rectangle 1 Plain

Rectangle 1 Cross Mullion

Rectangle 1 Rhombus

Rectangle 2

Rectangle 1 Plain

Rectangle 1 Cross Mullion

Rectangle 1 Rhombus

Rectangle 1 Rhombus

Rectangle 3

Vertical Square 1

Vertical Square 2

GSA Aluminium

ALUMINIUM WINDOWS & DECALS

CARTECK SECTIONAL GARAGE DOORS GSW 40-L

ALUMINIUM WINDOWS - POLYMER DOUBLE GLAZING Aluminium and polymer casement with polymer double glazed unit.

Alpha
280mm x 280mm

Sigma
610mm x 200mm

Zeta
ø280mm

Gamma
534mm x 344mm

Kappa
1860mm x 180mm

Athena
406mm x 203mm

Versus
900mm x 1000mm

Satin

Clear

All aluminium windows are available with these glazing options (satin is supplied as standard).

ALUNOX DECALS Factory bonded alunox decals. Decals can be positioned to requested positions, however, popular arrangements are shown here.

Access 1
431mm x 40mm

Access 2
430mm x 40mm

Access 3
215mm x 40mm

Access 4
400mm x 86mm

Access 5
180mm x 180mm

Access 6
70mm x 70mm

Access 7
150mm x 150mm

Access 8
194mm x 194mm

Access 9
436mm x 40mm

Access 10
431mm x 13mm

Writing
100mm x 200mm

EXTRA TOUCHES

PET FLAP

*Customer supplied

SPY HOLE

LETTER BOX

Polymer Windows

To price for windows fitted vertically down the door; square type 1 & 2, match windows to number of sections ie 4 sections = 4 windows).

Selected Trend colours & wood design windows are finished in a complementary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Night Oak (RAL8014), Winchester RAL8001, Textured Anthracite (RAL7016), Ice Crystal Grey Aluminium (RAL9007) and TT9016 Bling White (RAL9016).

The surrounds on aluminium GSA window sections are finished in a smooth finish.

Window frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different.

Polymer glazing in Georgian doors and Type 2 rectangle is 16mm thick. All other polymer glazing is 20mm thick.

Style	Overall Size	Colour / Finish
Rectangle 1	610 X 270	White Trend/Trend+/Ral/Wood design
Rectangle 2	680 X 210	White Trend/Trend+/Ral/Wood design
Rectangle 3	980 X 140	White Trend/Trend+/Ral/Wood design
Square 1 & 2	270 x 270	White Trend/Trend+/Ral/Wood design
GSA Aluminium Window Section	per linear m	White/Trend/Trend+ Ral/Wood design

All polymer windows are available with these glazing options:

*The exterior pane is Frosted/Satin and the interior pane is Clear.

Clear

Frosted*

Satin*

SLX VISION OPTIONS & CONFIGURATION

VISION OPTIONS

Sectional door panels made from hollow aluminium profiles, 40mm profile depth with 20mm scratch resistant, polymer double glazing.



Clear



Satin



Brown Tint
50% transmission
(approx)



Grey Tint
43% transmission
(approx)

WHAT WILL MY DOOR LOOK LIKE?

Full width glazing up to 3250mm wide (no mullions)



Single mullion over 3250mm wide, maximum width 4000mm.



The number of sections is dependent on door height and is shown below:




4 sections Doors up to 2280mm high. 5 sections Doors up to 2835mm high. 6 sections Doors up to 3000mm high.

GSA VISION OPTIONS & CONFIGURATION

GSA Vision Options

Sectional door panels made from hollow aluminium profiles, 40mm profile depth with 20mm scratch resistant, polymer double glazing.

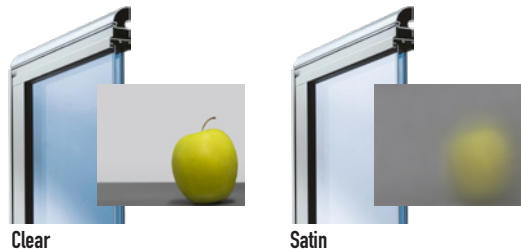

WHAT WILL MY DOOR LOOK LIKE?

The number of sections is dependent on door height and is shown below:



4 sections Doors up to 2280mm high. 5 sections Doors up to 2835mm high. 6 sections Doors up to 3000mm high.

The number of vertical mullions is dependent on door width and is shown below:

Doors up to 2235mm wide



◀ 2 windows

Doors up to 2438mm wide



◀ 3 windows

Doors up to 3353mm wide



◀ 4 windows

Doors up to 4420mm wide



◀ 5 windows

Doors up to 5500mm wide




◀ 6 windows

TECHNICAL CARTECK SUPER SIZE SECTIONAL GARAGE DOORS GSW 40-L


DIMENSIONS AND CLEARANCES

N - Normal fitting

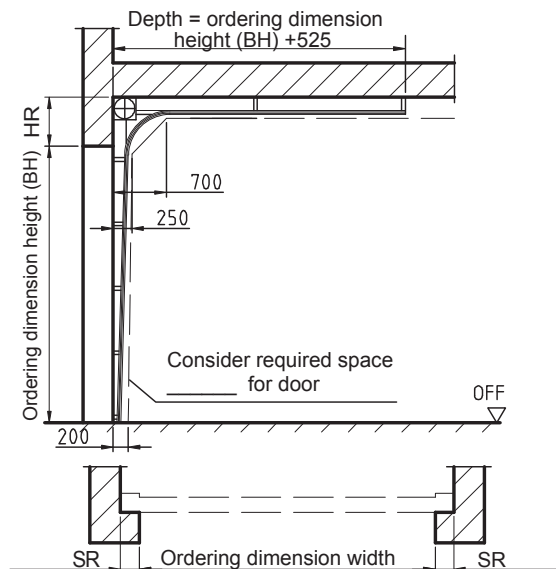

SR= side room with rail motor = 110
SR= side room non-drive side with direct drive motor = 110
SR= side room drive side with direct drive motor = 210

NSH - Low headroom fitting

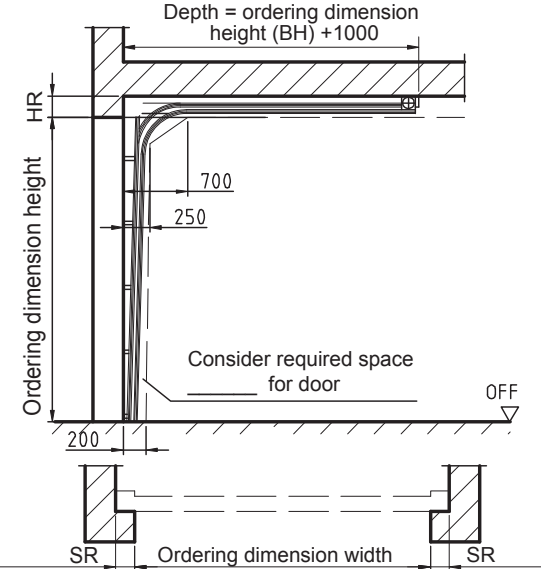

SR= side room with rail motor = 120
SR= side room non-drive side with direct drive motor = 120
SR= side room drive side with direct drive motor = 210

HR HEADROOM REQUIREMENT

Heights		Widths		6000	6500	7000	7500	8000
4 Sections	2250 7'4"	Rail Operator	Stand Headroom	400	450	-	-	-
			Low Headroom	280	280	-	-	-
		Direct Drive	Stand Headroom	400	450	450	450	450
			Low Headroom	250	250	250	250	250
5 Sections	2750 9'0"	Direct Drive	Stand Headroom	400	450	450	450	450
			Low Headroom	250	250	250	250	250
6 Sections	3000 9'9"	Direct Drive	Stand Headroom	400	450	450	450	450
			Low Headroom	250	250	250	250	250

Max Width For Low Headroom = 7750
280mm low headroom with rail operator is to prevent the top panel seal rubbing on the rail
If this is not an issue then the door will fit in 250mm

SPECIFICATION

DOOR:
Sectional door double skinned PUR foam core, 40mm thick CarTeck panels. Outer surface finished in choice of 4 standard designs and all standard listed CarTeck colours. Inner surface stucco design, colour similar to RAL 9002. Sections have a centre seal, EPDM, header, and floor seals. Different order heights are made up from mixing panel sizes, 2 different bottom profile sizes and reduced top panel heights. Doors have reinforcing steel profiles on the rear of the panels.

FRAME:
Door frame is made from hot dipped galvanised steel sections. Protective strips with EPDM sealing lips on both sides of the vertical tracks.

HARDWARE:
Doors have galvanised frame legs and are supplied without a header strip. Hardware has galvanised finish, screwed hinges to all sections, adjustable rollers with ball bearings. Front or optional rear mounted torsion spring with load-bearing steel cables. 1 pair of tension bars.


AUTOMATION:
Electric 230V drive as standard, either direct or rail drive. Optical safety edge, hard wired to control system and photocells. Direct drive motor must have 13 amp supply direct to consumer unit. External release is not possible with direct drive motor, additional access must be available into garage.

COLOURS
RAL references for colours are provided as a guide only to the nearest similar RAL colour. Colours will not match to other RAL finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL, BS or other colours will not be a precise match.
The door panel, frames and window frame colour shade, and surface lustre will show some slight variation, this is due to different base materials and coating methods.

POLYMER WINDOW OPTIONS

CARTECK SUPER SIZE SECTIONAL GARAGE DOORS GSW 40-L

WINDOWS - POLYMER DOUBLE GLAZING Polymer casement with polymer (Styrene Acrylonitrile) double glazed unit.

	Style	Overall Size	Colour / Finish
	Rectangle 1	610 X 270	White Trend/Trend+/Ral/Wood design
	Rectangle 2	680 X 210	White Trend/Trend+/Ral/Wood design
	Rectangle 3	980 X 140	White Trend/Trend+/Ral/Wood design
	Square 1 & 2	270 x 270	White Trend/Trend+/Ral/Wood design
	GSA Aluminium Window Section	per linear m	White/Trend/Trend+ Ral/Wood design

Polymer Windows

To price for windows fitted vertically down the door; square type 1 & 2, match windows to number of sections ie 4 sections = 4 windows).

Selected Trend colours & wood design windows are finished in a complementary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Night Oak (RAL8014), Winchester (RAL8001), Textured Anthracite (RAL7016), Ice Crystal Grey Aluminium (RAL9007) and TT9016 Bling White (RAL9016).


The surrounds on aluminium GSA window sections are finished in a smooth finish.

Window frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different.


Polymer glazing in Type 2 rectangle is 16mm thick. All other polymer glazing is 20mm thick.

All polymer windows are available with these glazing options:


*The exterior pane is Frosted/Satin and the interior pane is Clear.



Clear



Frosted*



Satin*

SECTION 2:


CARTECK SIDE HINGED GARAGE DOORS



TECHNICAL CARTECK SIDE HINGED GARAGE DOORS GSW 40-L

GEORGIAN DOORS

Horizontal doors have 2 columns of features as standard arranged 1/2 – 1/2, changing to an asymmetric three columns at the width shown below. 1/2 – 1/2 vertical doors have 2 rows of features as standard changing to three at the height shown right.

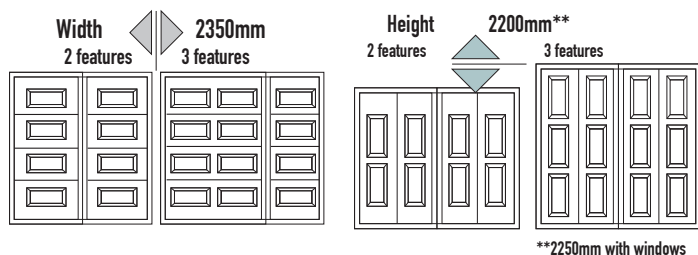

SPECIFICATION

DOOR:

Door leaves are fabricated using 40mm thick CarTeck panels with an extruded aluminium perimeter frame and integral seals. Doors with the optional standard threshold profile have an EPDM black threshold seal at the base. Each leaf is fitted with two concealed hinges. Large doors and doors with asymmetric leaves may have three hinges per leaf.

The door frame is an extruded aluminium profile with mitred corners and integral seals, for details refer to technical leaflet. A 3-part stepped aluminium threshold is also included. 10mm tolerance should be allowed to facilitate frame squaring during installation.

Doors supplied open-out as standard. Open-in is available as an option – please specify when ordering. NOTE: open-in doors increase the likelihood of water ingress. We recommend the drip guard option is selected with open-in doors.

HARDWARE:

Hardware comprises of a DIN standard CE marked European sashlock and a pair of stainless steel round bar lever handles on 50mm diameter roses. A Euro-profile cylinder and thumb turn with stainless steel escutcheons is included as standard (double cylinder, key both sides is available as an option if required). Three keys are supplied with each cylinder. The inactive leaf is fitted with top and bottom recessed lever action flush bolts. A stay is fitted to each leaf to hold the door in the open position, any leaf below 780mm wide (including asymmetric side hinged doors) will not have a stay. Stainless steel** needs regular cleaning or will stain, especially in areas of high salt content. Doors installed in coastal/high salinity environments must be fitted with a 316 Stainless Steel lever handle upgrade. Doors with standard stainless steel or black handles may experience corrosion of the handle and discolouration of the surrounding door finish. This will be excluded from warranty claims.


COLOUR:

The door frame and window frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different. Where differing materials and process are adopted, such as side hinged GSW 40L garage doors, there may be some colour matching variations. Differing light conditions may further reduce or highlight this effect. The colours RAL9006 and 9007 pose particular problems when colour matching, more information is available via the sales office.

RAL/BS references for colours are provided as a guide only to the nearest similar RAL/BS colour. Colours will not match to other RAL/BS finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL, BS or other colours will not be a precise match.

**For how to care for stainless steel see: www.teckentrup.co.uk/garage-doors/frequently-asked-questions-faqs

DIMENSIONS AND CLEARANCES

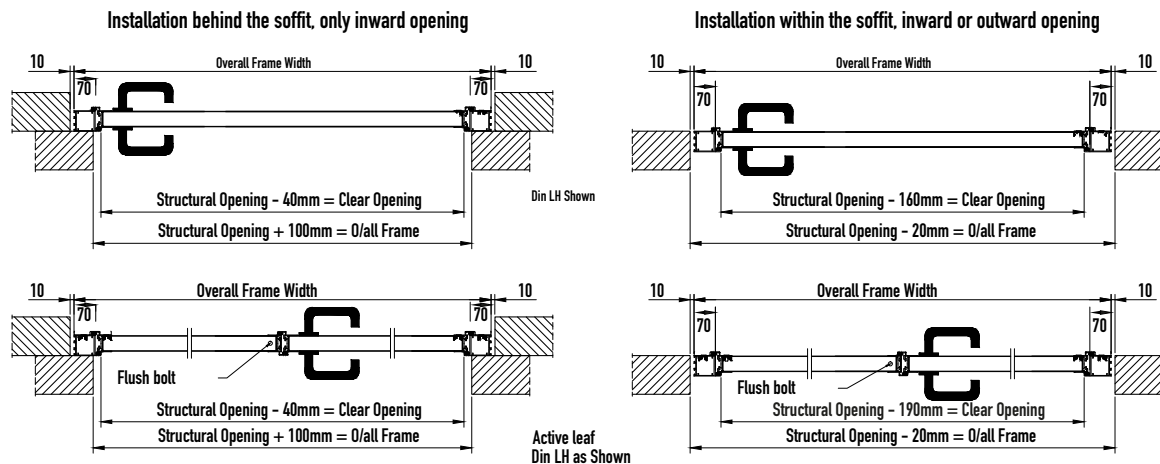


CLEARANCES

IMPORTANT

When doors are ordered as a structural opening size, Teckentrup UK will deduct 20mm from the width and 10mm from the height for coursing tolerance. If this is more tolerance than you wish, please state the over-frame dimension you require.



The section height and the height of the handle 'x' depend on the actual door height and construction of the door.

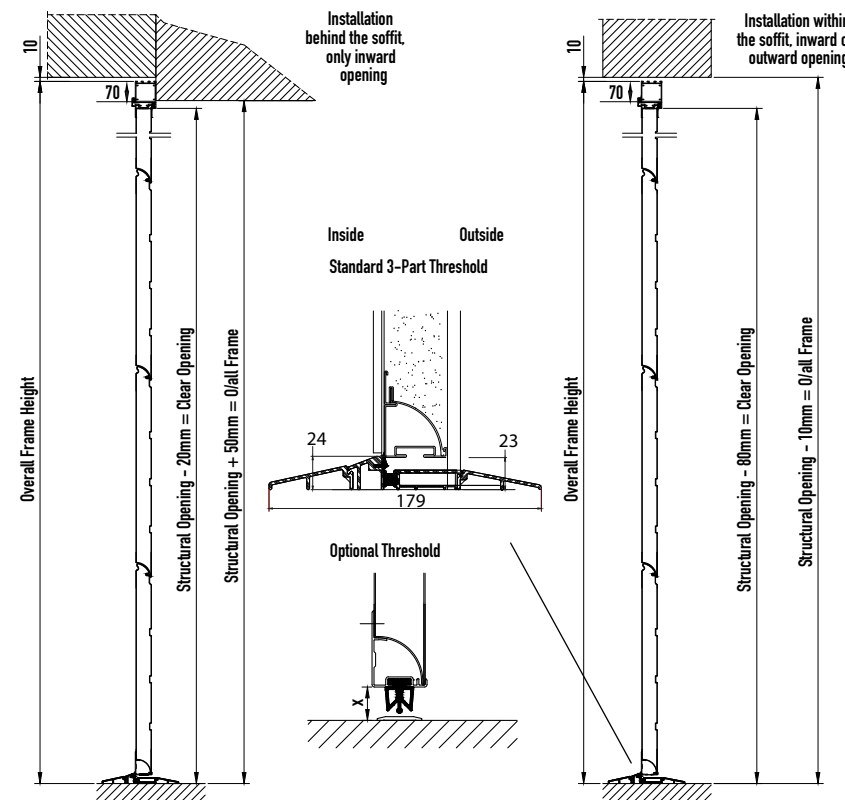

POLYMER WINDOWS

CARTECK SIDE HINGED GARAGE DOORS GSW 40-L

WINDOWS - POLYMER DOUBLE GLAZING Polymer casement with polymer (Styrene Acrylonitrile) double glazed unit.

Standard Rib, Centre Rib & Solid



1 Rectangle Plain



1 Rectangle Cross Mullion



1 Rectangle Rhombus



Rectangle 2

Georgian



1 Rectangle Plain



1 Rectangle Cross Mullion



Rectangle 3



Vertical Square 1



Vertical Square 2



GSA Aluminium



1 Rectangle Rhombus

Polymer Windows

To price for windows fitted vertically down the door; square type 1 & 2, match windows to number of sections ie 4 sections = 4 windows).

Selected Trend colours & wood design windows are finished in a complementary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Night Oak (RAL8014), Winchester RAL (8001), Textured Anthracite (RAL7016), Ice Crystal Grey Aluminium (RAL9007) and TT9016 Bling White (RAL9016).


The surrounds on aluminium GSA window sections are finished in a smooth finish.

Window frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different.


Style	Overall Size	Colour / Finish
	Rectangle 1 610 X 270	White Trend/Trend+/Ral/Wood design
	Rectangle 2 680 X 210	White Trend/Trend+/Ral/Wood design
	Rectangle 3 980 X 140	White Trend/Trend+/Ral/Wood design
	Square 1 & 2 270 x 270	White Trend/Trend+/Ral/Wood design
	GSA Aluminium Window Section per linear m	White/Trend/Trend+ Ral/Wood design

All polymer windows are available with these glazing options:

*The exterior pane is Frosted/Satin and the interior pane is Clear.



Clear



Frosted*



Satin*

ALUMINIUM WINDOWS & DECALS

CARTECK SIDE HINGED GARAGE DOORS GSW 40-L


ALUMINIUM WINDOWS - POLYMER DOUBLE GLAZING Aluminium and polymer casement with polymer double glazed unit.




Alpha
280mm x 280mm



Sigma
610mm x 200mm




Zeta
ø280mm




Gamma
534mm x 344mm




Kappa
1860mm x 180mm



Athena
406mm x 203mm



Versus
900mm x 1000mm



Satin

Clear

All aluminium windows are available with these glazing options (satin is supplied as standard).

Minimum over frame height for Kappa windows used vertically on side hinged doors: 2010mm


ALUNOX DECALS Factory bonded alunox decals. Decals can be positioned to requested positions, however, popular arrangements are shown here.



Access 1
431mm x 40mm




Access 2
430mm x 40mm




Access 3
215mm x 40mm



Access 4
400mm x 86mm




Access 5
180mm x 180mm




Access 6
70mm x 70mm




Access 7
150mm x 150mm




Access 8
194 mm x 194 mm



Access 9
436mm x 40mm



Access 10
431mm x 13mm



Writing
100mm x 200mm

EXTRA TOUCHES



PET FLAP

*Customer supplied



CODE LOCK



Inside

SMART LOCK

Bluetooth



Outside looks like a standard cylinder

SMART UPGRADE

Apple Home Kit / Alexa

SPY HOLE




LETTER BOX

Bespoke hardware fitting on request.

Teckentrup is a family business with operations throughout the world. In the UK Teckentrup is based in Warrington, Cheshire. Teckentrup products are available through a national network of independent Garage Door Specialist installers.

Teckentrup offers more than garage doors: We provide solutions and have set three quality standards for our garage doors:

Design. Security. Service.



Design

We combine ease of use with aesthetics.

Good design uses innovative technology to make using a product intuitive and effortless. Teckentrup garage doors offer a wide range of design options that will transform the look of your home and the way you use your garage space.



Safety & Security

We combine security with safety.

Our products are designed to provide peace of mind with both physical security and the knowledge that durability and safe operation are inherent.



Service

We combine speed with reliability.

The Teckentrup team and our network of Garage Door Specialist installers love to make your new door a pleasure to own. From planning to installation. You'll always receive expert advice and the best service for installation, maintenance and aftercare.

Quality & Environment

Teckentrup operates to quality procedures audited to ISO 9001.

We care about the environment too - this is why our products are certified in accordance with the Environmental Product Declaration (EPD).

ISO 14001 Environmental Management
ISO 50001 Energy Management



DGNB

Deutsche Gesellschaft für Nachhaltiges Bauen e. V. German Sustainable Building Council

BNB

Bewertungssystem Nachhaltiges Bauen - Evaluation system for sustainable building

LEED

Leadership in Energy and Environmental Design

BREEAM

Building Research Establishment Environmental Assessment Methodology



Teckentrup UK Limited,
Units 2-4 Opus 9 Industrial Estate,
Woburn Road, Winwick Quay Warrington WA2 8UE

www.teckentrup.co.uk

t: 01925 924 050

f: 08701 314 843

e: sales@teckentrup.co.uk



Raising Standards
Safety Assured

Member



CONTRACTORS HEALTH & SAFETY ASSESSMENT SCHEME
Accredited Contractor

www.has.co.uk



NBS Plus



riba product selector



LPCB Red Book

LPCB