



Security steel door Teckentrup 62-2 Secure 2

Text example:

Secure 2 burglar resistant steel door tested as per LPS1175 Issue 8. Double-leaf door element, type of handing Din right or Din left. Door-leaf 62mm thick, rebate on 3 sides. Corner frame 1.5 mm thick with 3-sided seal and optional bottom sill. Door leaf and frame galvanized and prime-coated in Grey white, similar to RAL 9002. Surface lock with latch, installed with profile cylinder and cylinder guard. Stainless steel handle set. 3 KO hinges with ball bearing.

Compile and tender according to requirements. Please refer to technical data below for respective details.

Updated 7th October 2019

Technical data

Also available in **STAINLESS STEEL**


Building authority approval:	Tested as per LPS1175 Issue 8 Securit Rating B3 (SR 2)
Installation in	<ul style="list-style-type: none"> ▪ Masonry wall min. 115 mm ▪ Concrete wall min. 100 mm ▪ Autoclaved aerated concrete wall -as per DIN 4165 min. 115 mm ▪ -reinforced type min. 115 mm
Approved dimensions	Outside frame dimension width: 1076 - 3076 mm Outside frame dimension height: 2000 - 3046 mm
Handing	DIN right or DIN left
Door leaf (trap door):	Double-skinned, thin rebated on 3 sides Door leaf thickness: 62 mm Sheet thickness: 1,0 or 1,5 mm Security bolt: 0 Insulation: mineral fibre board
Frame	Corner frame 1,5/2,0 mm thick, with 3-sided seal and bottom sill. Frame fixed with 5-6 screws on each side. Special equipment: block-, counter- or closed frame.
Surface	Door leaf/Frame galvanized and prime coated, similar to RAL 9002 (Grey white).
Hinges closing devices	<ul style="list-style-type: none"> ▪ 3 KO with ball bearings and 1 top door closer ▪ Compensation rings for height adjustment
Fittings	<ul style="list-style-type: none"> ▪ Surface lock with latch lever, installed with profile cylinder ▪ Stainless steel Security handle set, handle pivoted on Bearing.
Special equipment	<ul style="list-style-type: none"> ▪ Handle sets: stainless steel ES 3 with long plate ▪ Overhead door closer DIN EN 1154 ▪ Door status indicator ▪ Automatic Door opener ▪ Hold-open devices ▪ Threshold

Further qualifications (special equipment)

- **Smoke-proof** in accordance with DIN 18095 with top door closer
- **Sound insulated** as per DIN EN 20140/717
Rw 37 dB with retractable bottom seal
Rw 35 dB with sliding threshold seal
Rw 44 dB with different construction
- **Fire-proof** as per DIN EN 1634 - 1 EI₂-30
- **Panic** EN 1125
- **Emergency** EN 179
- **Balistic** EN 1522




Security steel door Teckentrup 62-2 Secure 2

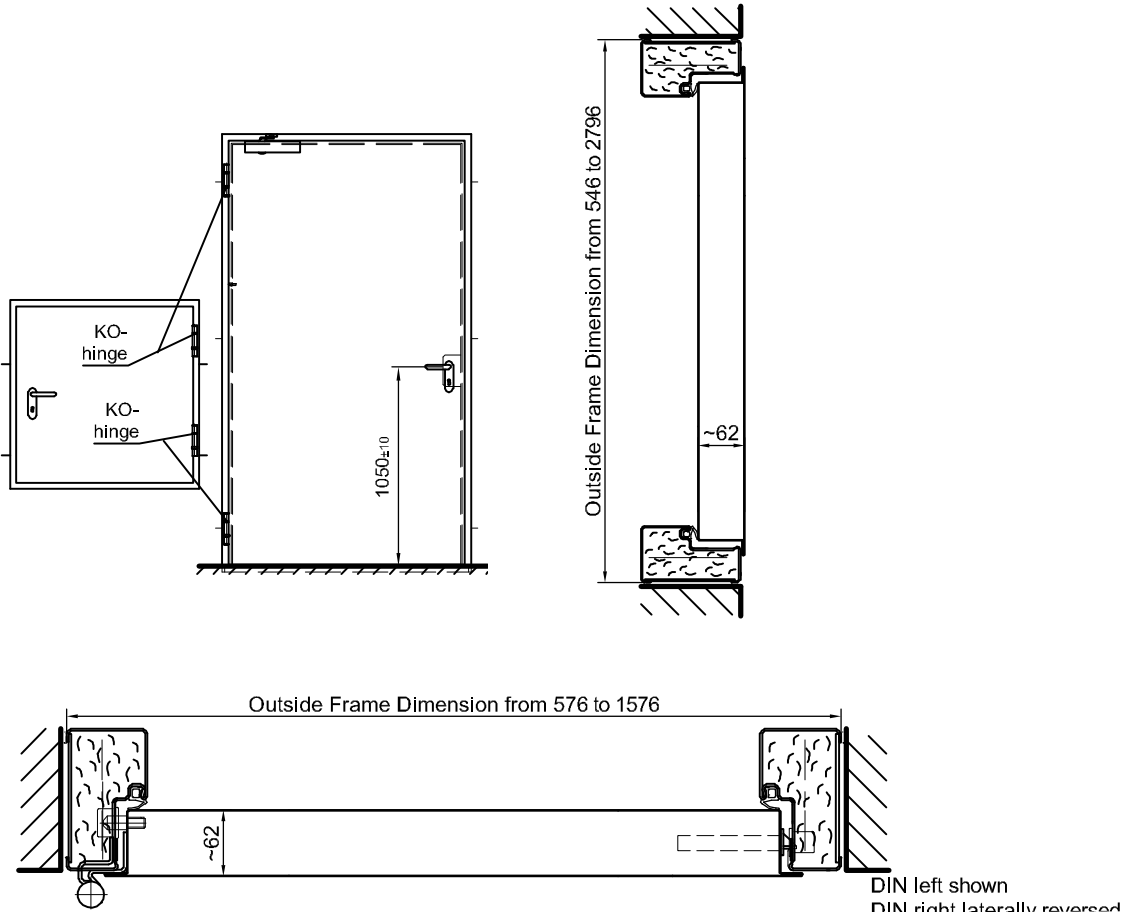

Floor connections:


- Image 1: With bottom buffer
- Image 2: With bottom buffer/seal
- Image 3: With bottom seal (smoke-proof door with overhead door closer)
- Image 4: sliding threshold seal

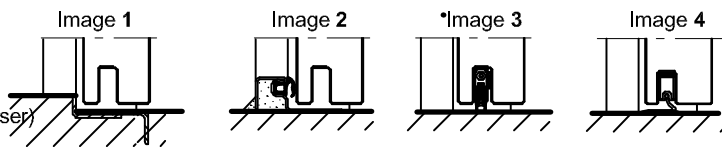


**Installation in masonry/
concrete walls**

- concrete walls ≥ 100 mm
- masonry walls ≥ 115 mm

Wall plug assembly

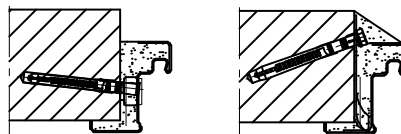

**Wall plug assembly -
closed frame and
counter frame**



**Installation with block
frame Flush installation
between**

- concrete walls ≥ 100 mm
- masonry walls ≥ 115 mm

