



Security steel door Teckentrup 62-2 Secure 3

Text example:

Secure 3 burglar resistant steel door tested as per LPS1175 Issue 8. Double-leaf door element, type of handing DIN right or DIN left. Door-leaf 62mm thick, rebate on 3 sides. Corner frame 1.5 mm thick with 3-sided seal and optional bottom sill. Door leaf and frame galvanized and prime-coated in Grey white, similar to RAL 9002. Surface lock with latch, installed with RIM cylinder and cylinder guard. Stainless steel handle set. 4 security bolts and 3 / 4 KO hinges with ball bearing.

Compile and tender according to requirements. Please refer to technical data below for respective details.

Updated 7th October 2019

Technical data

Also available in **STAINLESS STEEL**



Building authority approval:	Tested as per LPS1175 Issue 8 Securit Rating C5 (SR 3) for installation in internal wall	
Installation in	<ul style="list-style-type: none"> ▪ Masonry wall min. 115 mm ▪ Concrete wall min. 100 mm ▪ Autoclaved aerated concrete wall -as per DIN 4165 min. 115 mm ▪ -reinforced type min. 115 mm 	
Approved dimensions	Outside frame dimension width: 1070 - 4200 mm Outside frame dimension height: 2000 - 4200 mm	
Handing	DIN right or DIN left	
Door leaf (trap door):	Double-skinned, thin rebated on 3 sides Door leaf thickness: 62 mm Sheet thickness: 1,5 mm Security bolt: 4 Insulation: mineral fibre board	
Frame	Corner frame 2,0mm thick, with 3-sided seal and bottom sill. Frame fixed with 3-7 screws on each side. Special equipment: block-, counter- or closed frame. Block frame attached with special fastenings with M12 VA cylinder head screw	
Surface	Door leaf/Frame galvanized and prime coated, similar to RAL 9002 (Grey white).	
Hinges closing devices	<ul style="list-style-type: none"> ▪ 3 / 4 KO with ball bearings ▪ Compensation rings for height adjustment 	
Fittings	<ul style="list-style-type: none"> ▪ Surface lock with latch lever, installed with RIM cylinder ▪ Stainless steel handle set, handle pivoted on bearing. 	
Special equipment	<ul style="list-style-type: none"> ▪ Locks: <ul style="list-style-type: none"> · RIM cylinder · Panic Locks ▪ Overhead door closer DIN EN 1154 Door status indicator ▪ Automatic door opener ▪ Hold-open devices ▪ Threshold 	

Further qualifications (special equipment)

- **Smoke-proof** in accordance with DIN 18095 with top door closer
- **Sound insulated** as per DIN EN 20140/717
Rw 42 dB up to 3000 mm height
Rw 41 dB up to 3750 mm height
- **Fire-proof** as per DIN EN 1634 - 1
EI₂-30 (certifier)
- **Pressure resistance** in accordance with DIN 12211 up to 7500Pa
- **Panic** as per DIN EN 1125
- **Emergency** as per DIN EN 179




Security steel door Teckentrup 62-2 Secure 3

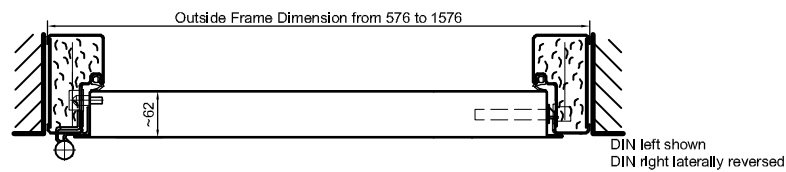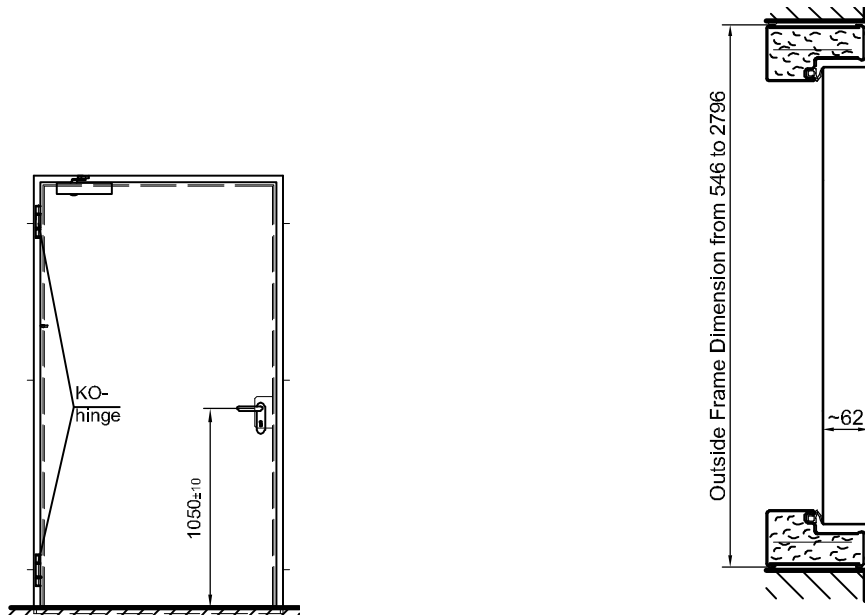


Floor connections:

- Image 1: With bottom buffer
- Image 2: With bottom buffer/seal
- Image 3: With bottom seal (smoke-proof door with overhead door closer)
- Image 4: sliding threshold seal

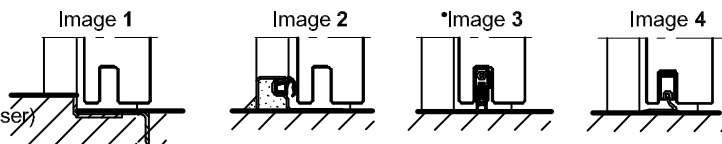

Installation with block frame Flush installation between

concrete walls ≥ 100 mm
masonry walls ≥ 115 mm

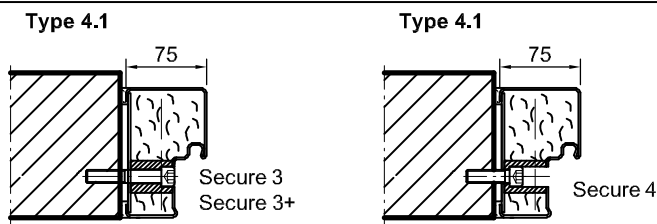

Installation in masonry/ concrete walls

concrete walls ≥ 100 mm
masonry walls ≥ 115 mm

