



Security steel door Teckentrup 62-2 Secure 4

Text example:

Secure 4 burglar resistant steel door tested as per LPS1175 Issue 8. Double-leaf door element, type of handing Din right or Din left. Door-leaf 62mm thick, rebate on 3 sides. Corner frame 1.5 mm thick with 3-sided seal and optional bottom sill. Door leaf and frame galvanized and prime-coated in Grey white, similar to RAL 9002. Surface lock with latch lever, installed with RIM cylinder and cylinder guard. Stainless steel handle set. 5 security bolts and 3 / 4 KO hinges with ball bearing.

Compile and tender according to requirements. Please refer to technical data below for respective details.

Updated 7th October 2019



Technical data

Also available in **STAINLESS STEEL**

Building authority approval:	Tested as per LPS1175 Issue 8 Securit Rating D10 (SR 4)		Further qualifications (special equipment)	▪ Smoke-proof in accordance with DIN 18095 with top door closer
Installation in	▪ Masonry wall	min. 115 mm		▪ Sound insulated as per DIN EN 20140/717 Rw 42 dB up to 3000 mm height Rw 41 dB up to 3750 mm height
	▪ Concrete wall	min. 100 mm		▪ Fire-proof as per DIN EN 1634 - 1 EI ₂ -60 / E 120 (certifier)
	▪ Autoclaved aerated concrete wall	-as per DIN 4165		▪ Pressure resistance in accordance with DIN 12211 up to 7500Pa
	-reinforced type	min. 115 mm		▪ Panic EN 1125
		min. 115 mm		▪ Emergency EN 179
Approved dimensions	Outside frame dimension width: 1076 - 4200 mm Outside frame dimension height: 2000 - 4200 mm			
Handing	DIN right or DIN left			
Door leaf (trap door):	Double-skinned, thin rebated on 3 sides Door leaf thickness: 62 mm Sheet thickness: 1,5 mm Security bolt: 5 Insulation: mineral fibre board			
Frame	Corner frame 2,0 mm thick, with 3-sided seal and bottom sill. Frame fixed with 5-7 screws on each side, attached with special fastenings with M12 VA cylinder head screw. Special equipment: block-, counter- or closed frame attached with special fastenings with M12 VA cylinder head screw			
Surface	Door leaf/Frame galvanized and prime coated, similar to RAL 9002 (Grey white).			
Hinges closing devices	▪ 3 / 4 KO with ball bearings ▪ compensation rings for height adjustment			
Fittings	▪ Surface lock with latch lever, installed with RIM-cylinder ▪ Stainless steel security handle set, handle pivoted on bearing.			
Special equipment	▪ Overhead door closer DIN EN 1154 ▪ Door status indicator ▪ Automatic door opener ▪ Hold-open devices ▪ Threshold			




Security steel door Teckentrup 62-2 Secure 4

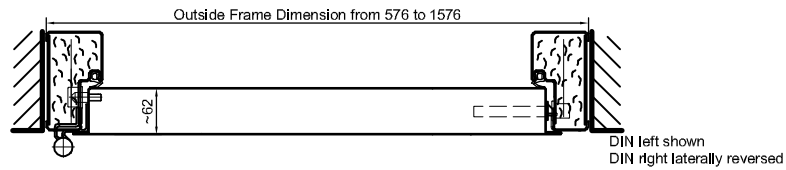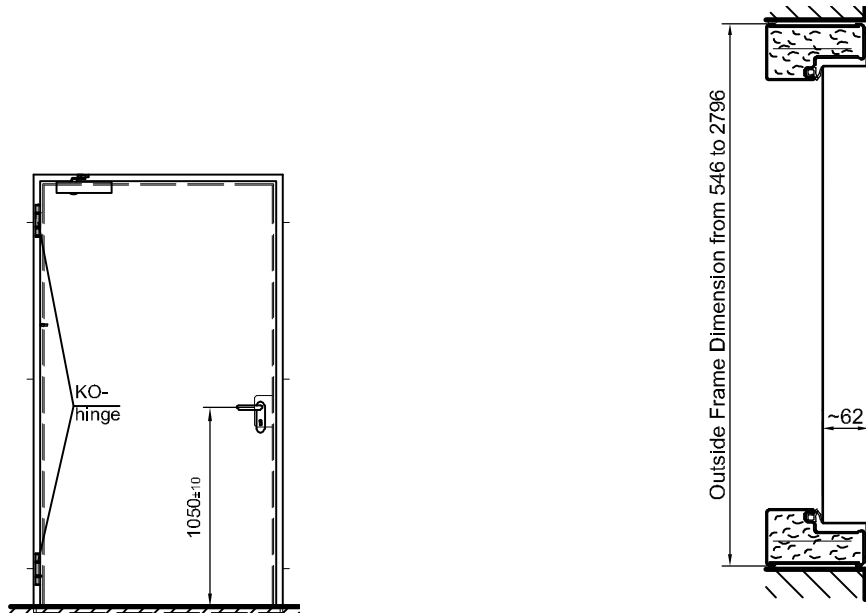


Floor connections:

- Image 1: With bottom buffer
- Image 2: With bottom buffer/seal
- Image 3: With bottom seal (smoke-proof door with overhead door closer)
- Image 4: sliding threshold seal

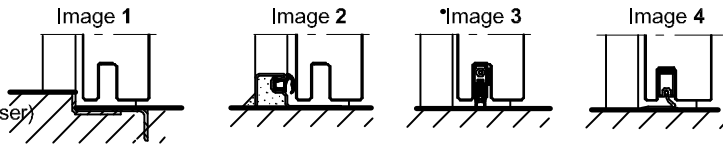

Installation with block frame Flush installation between

concrete walls ≥ 100 mm
masonry walls ≥ 115 mm

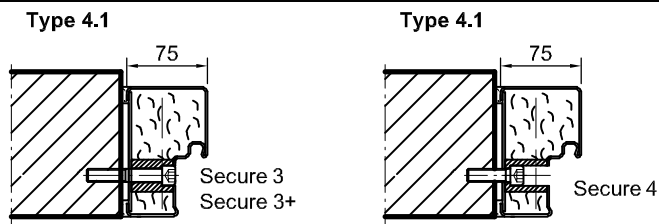

Installation in masonry/ concrete walls

concrete walls ≥ 100 mm
masonry walls ≥ 115 mm

