




# TECKENTRUP 62 SWING SECURE.

The secure & stylish swing garage door for your home.

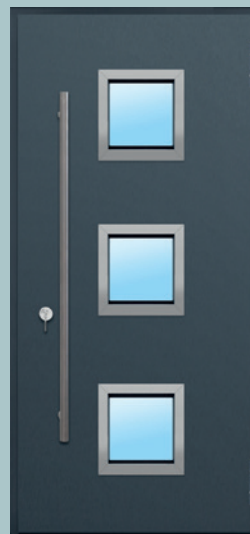

Tested to  
LPS 1175 Issue 8  
A1 (SR1)

# STYLISH, SECURE A CLASSIC, UPDATED



## TECKENTRUP 62-1 SWING SECURE

Single leaf versions for side access to your garage.

## TECKENTRUP 62-2 SWING SECURE GARAGE DOOR

Double leaf versions provide easy access and performance comparable to your front door.



Our doors are independently tested and certified to EN14351-1 and all current safety legislation and carry a CE mark.

#### A NEW AND SECURE LOOK FOR GARAGES

The main entrance doors to homes are becoming more attractive and high performance. Hinged swing garage doors, whilst still popular, are limited in choice and performance.

The Teckentrup 62 Swing Secure brings crisp aesthetics and comparable performance to the main entrance door; Thermal Transmittance, Resistance to Windload, Watertightness, Air Permeability and Operating Forces are all certified in these high performance doors.

Add to this, the option of certified security to the Secured by Design Police Preferred Specification, tested to LPS 1175 Issue 8 A1 (SR1) and Teckentrup 62 Swing Secure garage doors are a classic, updated for today's homes. The superb build quality of the double leaf doors is complemented by matching single leaf doors for side or rear access to your garage space.



Tested to LPS 1175 Issue 8 A1 (SR1)



**TECKENTRUP**  
DOOR SOLUTIONS

# STYLE YOUR DOOR



Lever Handle



## HANDLES

A black lever handle and security keyed cylinder is the standard configuration for all doors.

Stainless steel is available as an option - see image on page 6.

Stainless steel pull handles in two lengths can also be added in singles or pairs to add a striking contemporary look to your door.



1200mm 'D' Handle



1200mm 'D' Handle Pair



1500mm 'D' Handle



1500mm 'D' Handle Pair



**Colours**



White RAL 9016    Anthracite Grey RAL 7016    Jet Black RAL 9005




Doors can also be coloured to any RAL shade.

**HINGE OPTION**

KO hinges are supplied as standard and are matched to the door colour.

Stainless steel hinges are available as an option.



KO Hinge    Stainless Steel Hinge

**SECURITY OPTIONS**

Add certified security to The Secured by Design Police Preferred Specification.



Tested to LPS 1175 Issue 8 A1 (SR1)


**HIGH GRADE WINDOW OPTIONS**

All window units are double glazed and available with clear glazing for vision or frosted glazing to allow light in with privacy.




Glazing sizes:  
230mm x 1360mm  
545mm x 354mm  
300mm x 300mm  
300mm diameter

Windows are available with colour matched inserts or with a stainless steel surround.

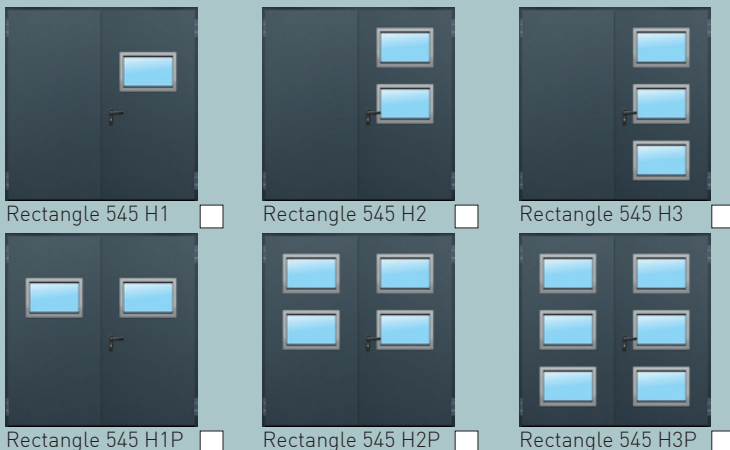

Rectangle 545 H1    Rectangle 545 H2    Rectangle 545 H3  
Rectangle 545 H1P    Rectangle 545 H2P    Rectangle 545 H3P

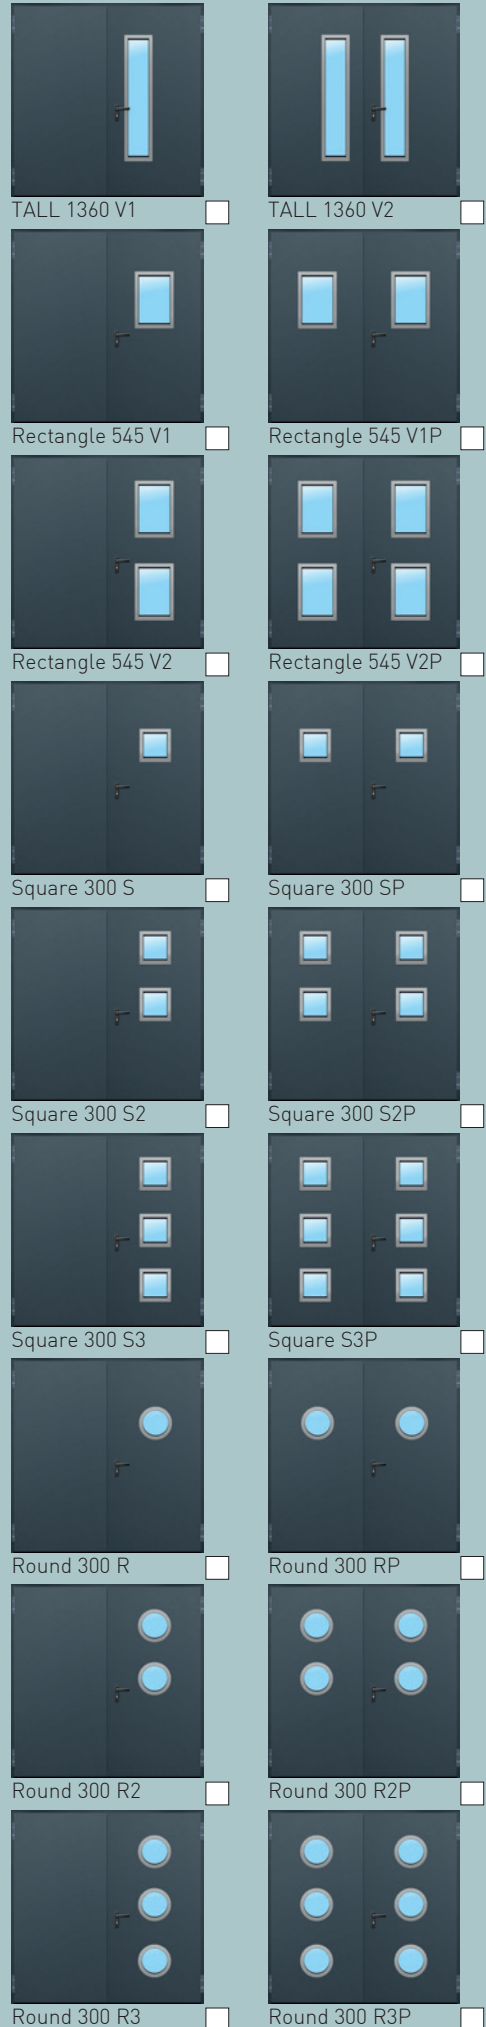

TALL 1360 V1    TALL 1360 V2  
Rectangle 545 V1    Rectangle 545 V1P  
Rectangle 545 V2    Rectangle 545 V2P  
Square 300 S    Square 300 SP  
Square 300 S2    Square 300 S2P  
Square 300 S3    Square S3P  
Round 300 R    Round 300 RP  
Round 300 R2    Round 300 R2P  
Round 300 R3    Round 300 R3P

# HIGH QUALITY BUILT TO LAST

U VALUE 1.4 Wm<sup>2</sup>K\*

The U value of the door confirms its insulation capability. The value is for a complete door with frame and is exceptionally low (which is good!).

Image shows the stainless steel handle option.

\*U value includes a 3mm clearance gap under the door.



## AUTOMATIC QUALITY

Every Teckentrup 62 Swing Secure is made to order in our automated production facility that operates to quality procedures audited to BS EN ISO 9001: 2008. We care about the environment too - this is why all of our products are certified in accordance with the Environmental Product Declaration (EPD).



## CERTIFIED PERFORMANCE

The door and frame are CE marked and have been independently tested to have the following impressive characteristics:

Insulation (Thermal Transmittance)	EN 13241-1 B: 1.4 Wm <sup>2</sup> K
Resistance to Windload	EN 12424:Class 2
Watertightness	EN 12425:Class 2
Air Permeability	EN 12426:Class 2
Operating Forces	EN 12604: 150N
Operating Cycles	EN1191 C5 (200,000)
Security (optional)	Secured by Design Police Preferred Specification



Tested to  
LPS 1175 Issue 8  
A1 (SR1)

## SECURITY



Each door is supplied with a pair of Security keys. Security keys add extra security by preventing unauthorised copying. They cannot be cut by anyone other than the issuer of the key - Teckentrup.



The inactive leaf is secured with flush bolts to the top and bottom of the leaf.

## Secured by Design



Police Preferred Specification

Doors are available with independently certified security to the Secured by Design Police Preferred Standard, tested to LPS 1175 Issue 8 A1 (SR1).

## THRESHOLD

For improved weather protection, a stepped aluminium threshold with a bulb weather strip is provided. The door leaves close against the raised weather strip creating an improved barrier to dust and debris. The threshold is DDA compliant for wheelchair access.



## HOLD OPEN STAYS


Double doors have foot activated stays to hold the door in the open position.



**Please note - stays are not designed for high wind applications.**

## RAIN-GUARD

An anodised aluminium rain-guard is supplied with all doors to help limit water ingress at the top of the door.



## FRAMES

Every door is supplied with a frame. A 'block frame' is the standard option with two variants, the 'Corner Frame' and the 'Corner Counter Frame'. Each frame is made from heavy gauge corrosion protected steel and provides a stable platform for the door to operate.



### BLOCK FRAME


The block frame is the standard frame design. Provided with Rockwool filling.



### CORNER FRAME

The innovative corner frame wraps around the front corner of the garage opening providing a neat edge. Its slim profile also gives an additional 56 mm drive through width compared to a block frame.

Requires back-filling with a foam sealant.

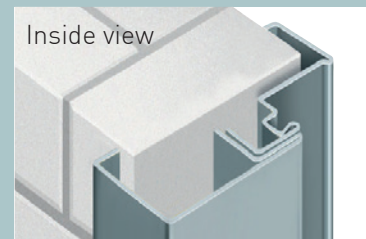


### CORNER COUNTER FRAME

The counter frame wraps around the front and back corner of the garage opening providing a neat edge. Its slim profile also gives an additional 56mm drive through width compared to a block frame.

Requires back-filling with a foam sealant.

## FB PROFILE OPTION

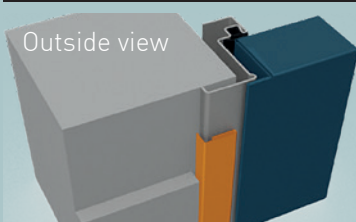

The FB Frame option allows for a flush finish between door lip, frame and wall finish on Corner and Corner Counter frames in new openings that are rendered after the door is installed. The FB option also provides a flush finish on block frames that are fixed at the front edge of the garage opening reveal.

Teckentrup is a family business with operations throughout the world. In the UK Teckentrup is based in Warrington, Cheshire. Teckentrup 62 Swing Secure is available through a national network of independent Garage Door Specialist installers.

Teckentrup offers more than garage doors: We provide solutions and have set three quality standards for our garage doors:

# Design.

# Security.

# Service.

## Warranty

2-year manufacturer's warranty residential use  
1-year manufacturer's warranty commercial use


- on panels against rust penetration from inside to outside
- on material and manufacturing flaws of all non-moving parts of the frame that are verifiably unusable or whose usability is substantially compromised
- on floor seal, intermediate seals and frame seals against rotting

The guarantee does not apply to doors which are subjected to extreme conditions, e.g. corrosive influences resulting from use in a coastal climate with high salt content.

Terms and conditions apply, visit [www.teckentrup.co.uk](http://www.teckentrup.co.uk) for details.

2

2 Year Guarantee



## Design

**We combine ease of use with aesthetics.**

Good design uses innovative technology to make using a product intuitive and effortless. Teckentrup 62 Swing Secure garage doors offer a wide range of design options that will transform the look of your home and the way you use your garage space.



## Safety & Security

**We combine security with safety.**

Our products are designed to provide peace of mind with both physical security and the knowledge that durability and safe operation are inherent.



## Service

**We combine speed with reliability.**

The Teckentrup team and our network of Garage Door Specialist installers love to make your new door a pleasure to own. From planning to installation. You'll always receive expert advice and the best service for installation, maintenance and aftercare.



Teckentrup UK Limited,  
Units 2-4, Opus 9 Industrial Estate,  
Woburn Road, Winwick Quay, Warrington WA2 8UE

[www.teckentrup.co.uk](http://www.teckentrup.co.uk)  
t: 01925 924 050  
f: 08701 314 843  
e: [sales@teckentrup.co.uk](mailto:sales@teckentrup.co.uk)



November 2019



Raising Standards  
Safety Assured  
Member



CONTRACTORS HEALTH & SAFETY ASSESSMENT SCHEME  
Accredited Contractor  
[www.chas.co.uk](http://www.chas.co.uk)



NBS Plus



riba  
product  
selector