
# **CONCEALED HINGED**


# **DOOR LEAF ALIGNMENT**

Watch the NEW expanded CarTeck side hinged garage door concealed hinge adjustment video for helpful tips and tricks to improve door leaf alignment and sealing. In the video, Dan takes you through alignment of all planes in detail, so it's well worth a watch even if you're a seasoned CarTeck installer!



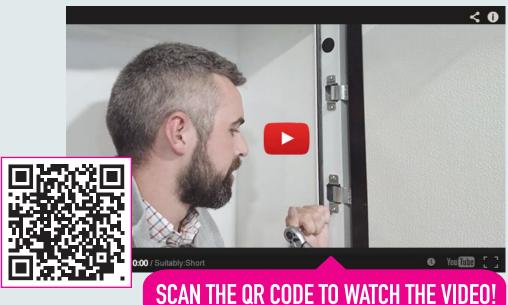

Concealed hinges are very easy to adjust:



## **Vertical alignment**

Use a T25 Torx to loosen these two screws to allow the leaf to move up and down in the frame profile, then tighten. All hinges may require adjustment.

#### Leaf-to-frame clearance

Use a T25 Torx to loosen these two screws, align using the slotted hole, then tighten. All hinges may require adjustment.

### **Gasket clamping force**

Use a T25 Torx to loosen these two screws, align using the slotted hole, then tighten. All hinges may require adjustment.



After adjustment of the hinges is complete, tighten the securing screws with a torque wrench to 8.5Nm torque.

QUESTION? Call the team on: 01925 924 050

Teckentrup UK Limited, Units 2-4 Opus 9 Industrial Estate, Woburn Road, Winwick Quay Warrington WA2 8UE t: 01925 924 050 f: 08701 314 843 e: sales@teckentrup.co.uk

