


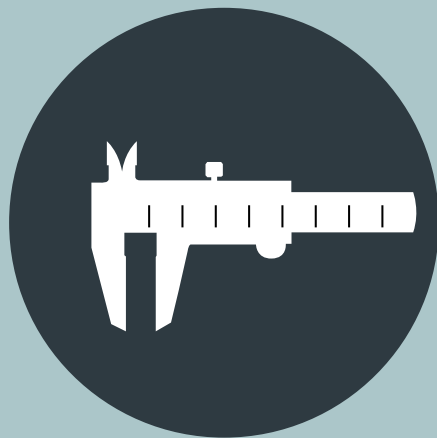

## HOME PRODUCTS TECHNICAL GUIDE

# CONTENTS

|                                           |               |
|-------------------------------------------|---------------|
| PERFORMANCE                               | PAGE 2        |
| WARRANTIES                                | PAGE 2        |
| SECTION 1:                                | PAGES 3 – 11  |
| CARTECK SECTIONAL GARAGE DOORS            |               |
| CARTECK SLX VISION SECTIONAL GARAGE DOORS |               |
| CARTECK GSA VISION SECTIONAL GARAGE DOORS |               |
| CARTECK SUPERSIZE SECTIONAL GARAGE DOORS  |               |
| SECTION 2:                                | PAGES 12 – 14 |
| CARTECK SIDE HINGED GARAGE DOORS          |               |
| SECTION 3:                                | PAGES 15 – 17 |
| CARTECK SIDE HINGED GARAGE DOORS          |               |

## WHAT PERFORMANCE CAN I EXPECT?

As Part of the CE marking process, each product must have its performance provided for a defined set of characteristics. Other characteristics can also be included if relevant to a door's performance, such as security. The following table shows the performance characteristics of each product in our range.

NPD signifies the product has not been measured for this characteristic (NPD – No Performance Determined)

| PERFORMANCE CHARACTERISTIC                | CarTeck Sectional Garage Doors | CarTeck Super Size Sectional Garage Doors | CarTeck Sectional GSA Vision Garage Doors | CarTeck Sectional SLX Vision Garage Doors | CarTeck Side Hinged Garage Doors | Teckentrup 62 Swing Secure Garage Doors |
|-------------------------------------------|--------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|----------------------------------|-----------------------------------------|
| Resistance to Windload EN 12424           | Class 2                        | Class 2                                   | Class 2                                   | Class 2                                   | Class 2                          | Class 2                                 |
| Watertightness EN12425                    | Class 2                        | Class 2                                   | Class 2                                   | Class 2                                   | NPD                              | Class 2                                 |
| Air Permeability EN 12426                 | Class 2                        | Class 2                                   | Class 2                                   | Class 2                                   | NPD                              | Class 2                                 |
| Thermal Transmittance EN 13241 – 1        | 1.38 W/m²k                     | 1.38 W/m²k                                | 3.3 W/m²k                                 | 3.5 W/m²k                                 | NPD                              | 1.4 W/m²k                               |
| Operating Forces (hand Operated) EN 12604 | 150 N                          | 150 N                                     | 150 N                                     | 150 N                                     | NPD                              | 150 N                                   |
| Operating Cycles EN 1191                  | NPD                            | NPD                                       | NPD                                       | NPD                                       | NPD                              | C5                                      |
| Burglar Resistance LPS 1175 Issue 8       | NPD                            | NPD                                       | NPD                                       | NPD                                       | NPD                              | A1 (SR1)                                |

## WARRANTY

The warranty periods below only apply to products that have been correctly installed as per the instructions and have been used, maintained by a Garage Door Specialist and cleaned in accordance with the requirements set out in the operating and maintenance sections of instructions and labels.

### CARTECK, SUPER SIZE, GSA VISION & SLX VISION SECTIONAL GARAGE DOORS

#### 2-year manufacturer's guarantee

- on polymer and aluminium window units

#### 5\*-year manufacturer's guarantee

- on SLX & GSA Vision windows, rollers, hinges, cable pulleys, cables and standard springs (opening/closing max. 5 times a day)

#### 10-year manufacturer's guarantee

- on panels against rust penetration from inside to outside
- against door panel separation of steel from foam
- on material and manufacturing flaws of all non-moving parts of the frame that are verifiably unusable or whose usability is substantially compromised
- on floor seal, intermediate seals, side seals and lintel seal against rotting

The guarantee does not apply to doors that are subjected to extreme conditions, e.g. corrosive influences resulting from use in a coastal climate with high salt content.

**\*2 -year for Super Size**

### CARTECK SIDE HINGED GARAGE DOORS

#### 2-year manufacturer's guarantee

- on window units, hinges, locks, handles and stays (opening/closing max. 5 times a day)

#### 10-year manufacturer's guarantee

- on panels against rust penetration from inside to outside
- against door panel separation of steel from foam
- on material and manufacturing flaws of all non-moving parts of the frame that are verifiably unusable or whose usability is substantially compromised
- on floor seal, intermediate seals and frame seals against rotting

The guarantee does not apply to doors that are subjected to extreme conditions, e.g. corrosive influences resulting from use in a coastal climate with high salt content.

### TECKENTRUP 62 SWING SECURE GARAGE DOORS

#### 2-year manufacturer's guarantee

- on mechanical defects, material and manufacturing flaws of all non-moving parts of the frame that are verifiably unusable or whose usability is substantially compromised

#### 10-year manufacturer's guarantee

- on panels against rust penetration from inside to outside
- on floor seal and frame seals against rotting

The guarantee does not apply to doors that are subjected to extreme conditions, e.g. corrosive influences resulting from use in a coastal climate with high salt content.

### CARTECK DRIVE & MOTOR

#### \*5-year manufacturer's guarantee

- on mechanical defects, material and manufacturing flaws. (opening/closing max. 5 times a day)\*\*

#### \*2 -year for Super Size

\*\* Consumable Items are not included within warranty terms and conditions: hand transmitters, light bulbs, fuses & batteries.

## SECTION 1:

CARTECK SECTIONAL GARAGE DOORS

CARTECK SLX VISION SECTIONAL GARAGE DOORS

CARTECK GSA VISION SECTIONAL GARAGE DOORS


CARTECK SUPERSIZE SECTIONAL GARAGE DOORS



## TECHNICAL CARTECK SECTIONAL GARAGE DOORS GSW 40-L & GSA/SLX VISION


**DIMENSIONS    ORDERING SIZES = DRIVE THROUGH SIZES**

**Observe the following measurement details to guarantee exact assembly and precise, reliable operation of CarTeck sectional garage doors.**

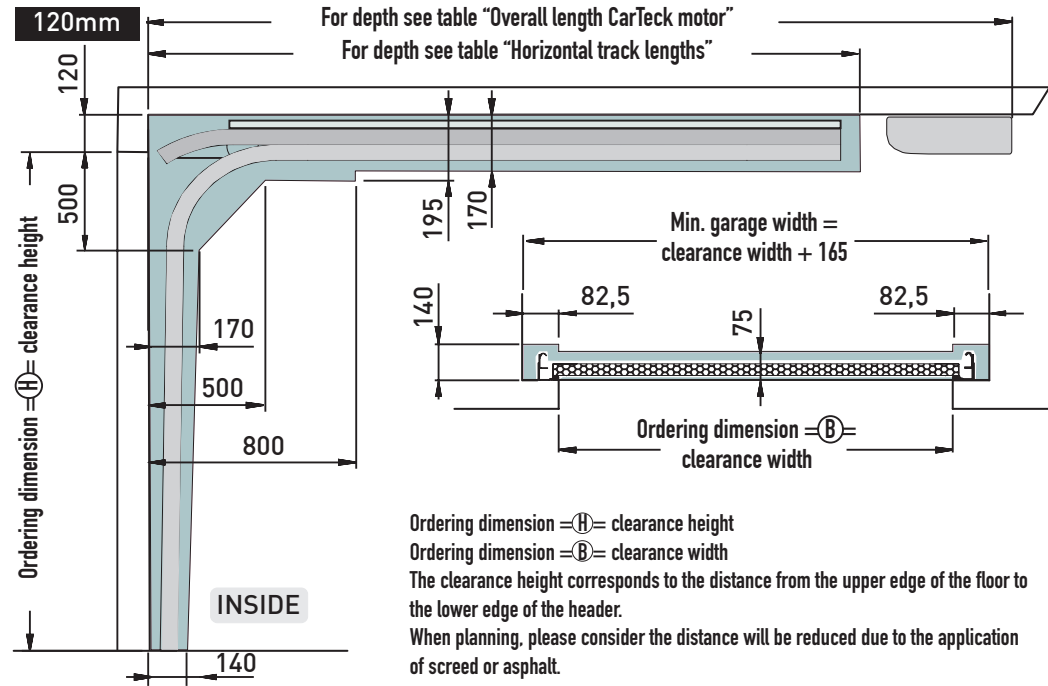

## RECOMMENDED HORIZONTAL TRACK FIXING POINTS

If the rear spacer bar extending side fixings are securely fixed, the second fixing point, shown within  is not required.

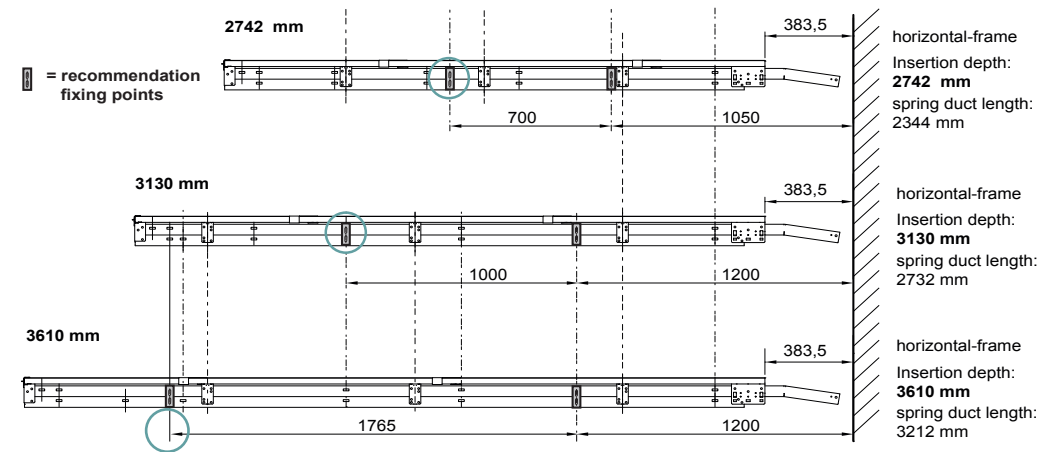

### ORDERING NOTES:

Door heights achieved by mixing panel heights (except ribbed), use of 0, 9, 17, or 32mm bottom profiles or top & bottom panel cut downs. When ordering use metric sizes, imperial conversions are nominal.

## Frame holes & fixing brackets

|                                                                                          |      | Width |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      |        |
|------------------------------------------------------------------------------------------|------|-------|------|------|------|------|------|------|------------------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|--------|
| Height                                                                                   | 2084 | 2134  | 2235 | 2286 | 2388 | 2438 | 2591 | 2743 | 3048                                                                                     | 3353 | 3658 | 3962 | 4216 | 4267 | 4420 | 4572 | 4877 | 5182 | 5500 | Height |
| 3000                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 3000   |
| 2875                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2875   |
| 2750                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2750   |
| 2625                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2625   |
| 2500                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2500   |
| 2375                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2375   |
| 2250                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2250   |
| 2204                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2204   |
| 2175                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2175   |
| 2125                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2125   |
| 2084                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2084   |
| 2050                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2050   |
| 2000                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 2000   |
| 1925                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 1925   |
| 1875                                                                                     |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      | 1875   |
| Height                                                                                   | 2084 | 2134  | 2235 | 2286 | 2388 | 2438 | 2591 | 2743 | 3048                                                                                     | 3353 | 3658 | 3962 | 4216 | 4267 | 4420 | 4572 | 4877 | 5182 | 5500 | Height |
| Requires frame leg holes (standard frame) and twist fix frame leg brackets.              |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      |        |
| Twist fix frame leg brackets not required.                                               |      |       |      |      |      |      |      |      | Twist fix frame leg brackets required.                                                   |      |      |      |      |      |      |      |      |      |      |        |
| No holes in frame leg as an option (between fix frame with stiffener brackets required). |      |       |      |      |      |      |      |      | No holes in frame leg as an option (between fix frame with stiffener brackets required). |      |      |      |      |      |      |      |      |      |      |        |
| Width                                                                                    |      |       |      |      |      |      |      |      |                                                                                          |      |      |      |      |      |      |      |      |      |      |        |

## HORIZONTAL TRACK LENGTHS

 Allow 115mm headroom. Use standard lifting gear.

 Allow 140mm headroom above trays only.  
Gear uses twin springing & commercial roller spindles

|        |      | Width |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |        |  |
|--------|------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--------|--|
| Height | 2084 | 2134  | 2235 | 2286 | 2388 | 2438 | 2591 | 2743 | 3048 | 3353 | 3658 | 3962 | 4216 | 4267 | 4420 | 4572 | 4877 | 5182 | 5500 | Height |  |
| 3000   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 3000   |  |
| 2875   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2875   |  |
| 2750   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2750   |  |
| 2625   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2625   |  |
| 2500   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2500   |  |
| 2375   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2375   |  |
| 2250   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2250   |  |
| 2204   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2204   |  |
| 2175   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2175   |  |
| 2125   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2125   |  |
| 2084   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2084   |  |
| 2050   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2050   |  |
| 2000   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2000   |  |
| 1925   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 1925   |  |
| 1875   |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 1875   |  |
| Height | 2084 | 2134  | 2235 | 2286 | 2388 | 2438 | 2591 | 2743 | 3048 | 3353 | 3658 | 3962 | 4216 | 4267 | 4420 | 4572 | 4877 | 5182 | 5500 | Height |  |
| Width  |      |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |        |  |

## SPECIFICATION

### GSW 40-L Sectional door

#### DOOR:

Sectional door double skinned PUR foam core, 40mm thick CarTeck panels. Outer surface finished in choice of 4 standard designs and all standard listed CarTeck colours. Inner surface stucco design, colour similar to RAL 9002. Sections have a centre seal; EPDM, header, and floor seals. Different order heights are made up from mixing panel sizes, 4 different bottom profile sizes and reduced top panel heights.

#### FRAME:

Door frame is made from galvanized sheet steel, coil coated with polyester, prime coated similar to RAL 9016 or other Trend colour. Protective strips with EPDM sealing lips on both sides of the vertical tracks.

#### HARDWARE:

Galvanised finish, screwed hinges to all sections, adjustable rollers with ball bearings. Multiple tension springs and double cable system housed in low friction housing above horizontal tracks.

#### AUTOMATION:

Door prepared for automation as standard with manual locking available as optional extra.

### COLOURS

RAL references for colours are provided as a guide only to the nearest similar RAL colour. Colours will not match to other RAL finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL, BS or other colours will not be a precise match.

The door panel, frames and window frame colour shade, and surface lustre will show some slight variation, this is due to different base materials and coating methods.

### GSA / SLX Vision Sectional door

#### DOOR:

Sectional door panels made from hollow aluminium profiles, 40mm depth filled with 16mm scratch resistant, polymer double glazing. Sections have a centre seal; EPDM, header, and floor seals. Door heights are achieved by equal division of panel heights ranging from 300mm to 750mm.

SLX Vision: Max door height 3000mm. Max door width 4000mm.

GSA Vision max door size as CarTeck Sectional.

#### FRAME:

Door frame is made from galvanized sheet steel, coil coated with polyester, prime coated similar to RAL 9016 or other Trend colour. Protective strips with EPDM sealing lips on both sides of the vertical tracks.

#### HARDWARE:

Hardware, galvanised finish, screwed hinges to all sections, adjustable rollers with ball bearings. Multiple tension springs and double cable system housed in low friction housing above horizontal tracks.

#### AUTOMATION:


Door prepared for automation as standard.

### COLOURS

RAL references for colours are provided as a guide only to the nearest similar RAL colour. Colours will not match to other RAL finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL, BS or other colours will not be a precise match.

The door panel, frames and window frame colour shade, and surface lustre will show some slight variation, this is due to different base materials and coating methods.

## NO HOLES FRAME FIXING




### IMPORTANT !

When fixing a no-holes frame between the reveal you must secure the frame to the lintel as shown using the 'L' bracket supplied. This is pre-fitted to all no-holes frame legs.


If a good fixing cannot be achieved, alternative fixing methods must be used to secure the frame.



## CARTECK DRIVE 500 / 600 DIMENSIONS

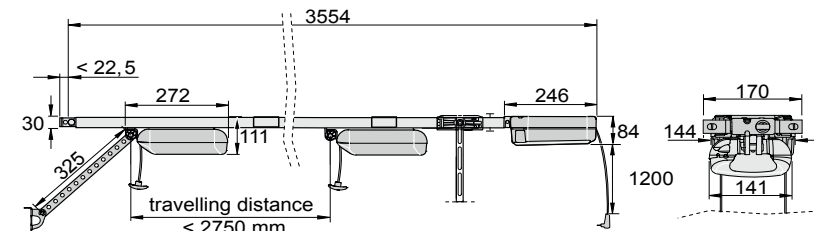

## CARTECK DRIVE PRO 500 / 600 DIMENSIONS

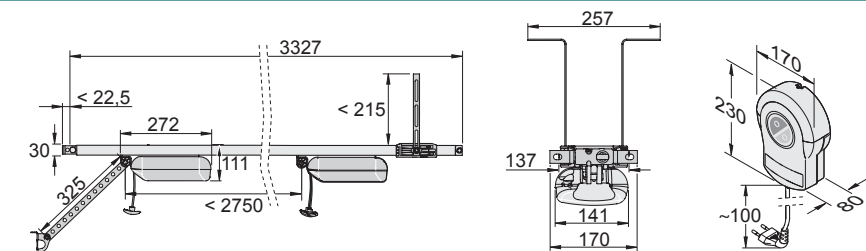

## OPERATOR RAIL FOR CARTECK 260/70/80 & 360/370/380

Turning motor head through 90 degrees reduces overall length: 200 series -133mm 300 series -18mm

| Carteck 260 / 360 |        |       |      |      |      |      | Carteck 270 / 370 |      |      |      | Carteck 280 / 380 |      |      |      |      |      |      |      |      |        |      |  |
|-------------------|--------|-------|------|------|------|------|-------------------|------|------|------|-------------------|------|------|------|------|------|------|------|------|--------|------|--|
|                   |        | Width |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        |      |  |
| Height            | 2084   | 2134  | 2235 | 2286 | 2388 | 2438 | 2591              | 2743 | 3048 | 3353 | 3658              | 3962 | 4216 | 4267 | 4420 | 4572 | 4877 | 5182 | 5500 | Height |      |  |
| 3000              | 4296mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 3000 |  |
| 2875              | 4296mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2875 |  |
| 2750              | 4296mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2750 |  |
| 2625              | 4296mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2625 |  |
| 2500              | 3536mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2500 |  |
| 2375              | 3536mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2375 |  |
| 2250              | 3536mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2250 |  |
| 2204              | 3536mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2204 |  |
| 2175              | 3536mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2175 |  |
| 2125              | 3536mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2125 |  |
| 2084              | 3286mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2084 |  |
| 2050              | 3286mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2050 |  |
| 2000              | 3286mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 2000 |  |
| 1925              | 3286mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 1925 |  |
| 1875              | 3286mm |       |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        | 1875 |  |
| Height            | 2084   | 2134  | 2235 | 2286 | 2388 | 2438 | 2591              | 2743 | 3048 | 3353 | 3658              | 3962 | 4216 | 4267 | 4420 | 4572 | 4877 | 5182 | 5500 | Height |      |  |
|                   |        | Width |      |      |      |      |                   |      |      |      |                   |      |      |      |      |      |      |      |      |        |      |  |

## OPERATOR RAIL FOR CARTECK DRIVE & DRIVE PRO

|        |  | Width |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |        |  |  |
|--------|--|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--------|--|--|
| Height |  | 2084  | 2134 | 2235 | 2286 | 2388 | 2438 | 2591 | 2743 | 3048 | 3353 | 3658 | 3962 | 4216 | 4267 | 4420 | 4572 | 4877 | 5182 | 5500 | Height |  |  |
| 3000   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 3000   |  |  |
| 2875   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2875   |  |  |
| 2750   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2750   |  |  |
| 2625   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2625   |  |  |
| 2500   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2500   |  |  |
| 2375   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2375   |  |  |
| 2250   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2250   |  |  |
| 2204   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2204   |  |  |
| 2175   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2175   |  |  |
| 2125   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2125   |  |  |
| 2084   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2084   |  |  |
| 2050   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2050   |  |  |
| 2000   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 2000   |  |  |
| 1925   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 1925   |  |  |
| 1875   |  |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 1875   |  |  |
| Height |  | 2084  | 2134 | 2235 | 2286 | 2388 | 2438 | 2591 | 2743 | 3048 | 3353 | 3658 | 3962 | 4216 | 4267 | 4420 | 4572 | 4877 | 5182 | 5500 | Height |  |  |
|        |  | Width |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |        |  |  |

## 3D PROFILE KITS

### The kits:

85mm frame leg kit 2no. 85mm x 12mm x 3000mm

85/120mm 3D profile kit 2no. 85mm x 12mm x 3000mm  
1no. 120mm x 12mm x 3000mm

120mm 3D profile kit 3no. 120mm x 12mm x 3000mm


\*85mm frame leg kit & additional door header 2no. 85mm x 12mm x 3000mm  
(The additional door header will be supplied to the door ordering size +200mm)

70mm angle 3D kit 3no. 70mm x 12mm x 3000mm

\* For doors over 3 metres wide - additional door header eliminates the join that would occur using a 120mm 3D profile (max length 3 metres)


### IMPORTANT !

3D frame legs include two lintel fixing brackets that must be used to secure the top of the frame leg, preventing lateral movement.

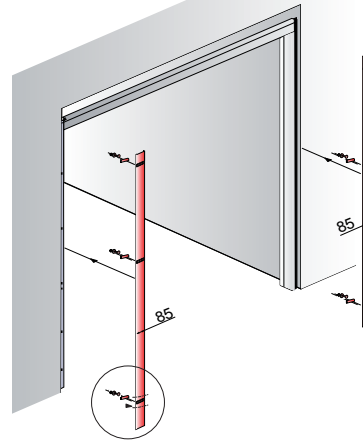


The 3D profiles have a smart fixing that allows for lateral movement - perfect for bridging small fitting gaps or tidying up the front face of the opening.

Shown here on the 85mm 3D profile.





3D profile smart fixing bracket 85 mm


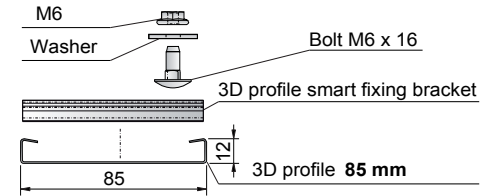


### 85mm frame leg 3D profile kit

85mm frame leg 3D cover profiles for between the reveal fit with lateral movement for up to 30mm gap coverage or up to 30mm overlap.





**Note:** The frame leg 3D kit profiles are 12mm deep and will create a step at the header. Use an 85/120 3D profile kit for a flush finish.





### 85mm/120mm 3D profile kit

Also available in a kit with a 120mm header 3D cover profile.




### 120mm 3D profile kit

120mm 3D cover profiles for between the reveal fit at the front edge with lateral movement for up to 65mm overlap.

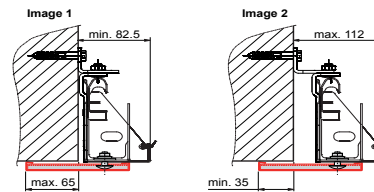



### 85mm frame leg kit & additional door header

Perfect for doors over 3000mm wide - our 120mm 3D profile comes in 3000mm lengths requiring a butted joint on larger doors - this kit includes a second full-width single piece header for a seamless finish.



### 70mm angle 3D renovating profile

Use this when fitting behind the reveal or part between to neaten up damaged openings. The 70mm angle 3D renovating profile is held between the frame and the brickwork and will cover the back corner of the opening to tidy up any damaged wall edges. Ideal when removing timber frame and brick work deteriorated. Supplied in 3000mm lengths for on-site cutting to the required length.

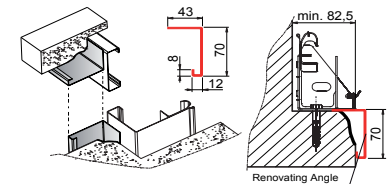

**N.B.!** 3D profile kits must be used in conjunction with colour matched frames.

# POLYMER WINDOWS

CARTECK SECTIONAL GARAGE DOORS GSW 40-L

## WINDOWS - POLYMER DOUBLE GLAZING

Windows construction: Polymer casement with polymer (Styrene Acrylonitrile) double glazed unit.

### Georgian



Rectangle 1 Plain    Rectangle 1 Cross Mullion    Rectangle 1 Rhombus

### Standard Rib, Centre Rib & Solid



Rectangle 1 Plain    Rectangle 1 Cross Mullion    Rectangle 1 Rhombus    Rectangle 2    Rectangle 3    Vertical Square 1    Vertical Square 2    GSA Aluminium

| Style                        | Overall Size | Colour / Finish                |
|------------------------------|--------------|--------------------------------|
| Rectangle 1                  | 610 X 270    | White<br>Trend/Ral/Wood design |
| Rectangle 2                  | 680 X 210    | White<br>Trend/Ral/Wood design |
| Rectangle 3                  | 980 X 140    | White<br>Trend/Ral/Wood design |
| Square 1 & 2                 | 270 x 270    | White<br>Trend/Ral/Wood design |
| GSA Aluminium Window Section | per linear m | White/Trend<br>Ral/Wood design |

All polymer windows are available with these glazing options:



Clear



Frosted



Satin

### Polymer Windows

Selected Trend colours & wood design windows are finished in a complementary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Night Oak (RAL8014), Textured Anthracite (RAL7016) and Ice Crystal Grey Aluminium (RAL9007). The surrounds on aluminium GSA window sections are finished in a smooth finish. Window frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different. Polymer glazing in Georgian doors and Type 2 rectangle is 16mm thick. All other polymer glazing is 20mm thick.


# ALUMINIUM WINDOWS & DECALS

CARTECK SECTIONAL GARAGE DOORS GSW 40-L

## ALUMINIUM WINDOWS - POLYMER DOUBLE GLAZING

### Alpha

280mm x 280mm




### Sigma

610mm x 200mm



### Zeta

ø280mm




### Gamma

534mm x 344mm




### Kappa

1860mm x 180mm




### Athena

406mm x 203mm



### Versus

900mm x 1000mm



Satin



Clear

All aluminium windows are available with these glazing options (satin is supplied as standard).

## ALUNOX DECALS

Factory bonded alunox decals. Decals can be positioned to requested positions, however, popular arrangements are shown here.


### Access 1

431mm x 40mm



### Access 2

430mm x 40mm




### Access 3

215mm x 40mm




### Access 4

400mm x 86mm




### Access 5

180mm x 180mm




### Access 6

70mm x 70mm




### Access 7

150mm x 150mm




### Access 8

194 mm x 194 mm




### Access 9

436mm x 40mm




### Access 10

431mm x 13mm



### Writing

100mm    200mm



### Coach House Mock Hinges

277mm x 81mm



### Coach House Mock Handles & Centre joint

36mm x 178mm




# EXTRA OPTIONS

CARTECK SECTIONAL GARAGE DOORS GSW 40-L

## EXTRA TOUCHES

### PET FLAP

\*Customer supplied



### SPY HOLE



### LETTER BOX





# SLX VISION OPTIONS & CONFIGURATION

## VISION OPTIONS

Sectional door panels made from hollow aluminium profiles, 40mm profile depth with 20mm scratch resistant, polymer double glazing.



Clear      Satin      Frosted



Green Tint      Brown Tint      Grey Tint  
70% transmission (approx)      50% transmission (approx)      43% transmission (approx)

## WHAT WILL MY DOOR LOOK LIKE?

Full width glazing up to 3250mm wide (no mullions)



Single mullion over 3250mm wide, maximum width 4000mm.



The number of sections is dependent on door height and is shown below:



4 sections Doors up to 2280mm high.      5 sections Doors up to 2835mm high.      6 sections Doors up to 3000mm high.



# GSA VISION OPTIONS & CONFIGURATION

### GSA Vision Options

Sectional door panels made from hollow aluminium profiles, 40mm profile depth with 20mm scratch resistant, polymer double glazing.

Clear

Satin

Frosted

Green Tint  
70% transmission (approx)

Brown Tint  
50% transmission (approx)

Grey Tint  
43% transmission (approx)

### WHAT WILL MY DOOR LOOK LIKE?

The number of sections is dependent on door height and is shown below:

4 sections Doors up to 2280mm high.

5 sections Doors up to 2835mm high.

6 sections Doors up to 3000mm high.

The number of vertical mullions is dependent on door width and is shown below:

Doors up to 2235mm wide

◀ 2 windows

Doors up to 2438mm wide

◀ 3 windows

Doors up to 3353mm wide

◀ 4 windows

Doors up to 4420mm wide

◀ 5 windows



Doors up to 5500mm wide

◀ 6 windows

9

# TECHNICAL CARTECK SUPER SIZE SECTIONAL GARAGE DOORS GSW 40-L

## DIMENSIONS AND CLEARANCES

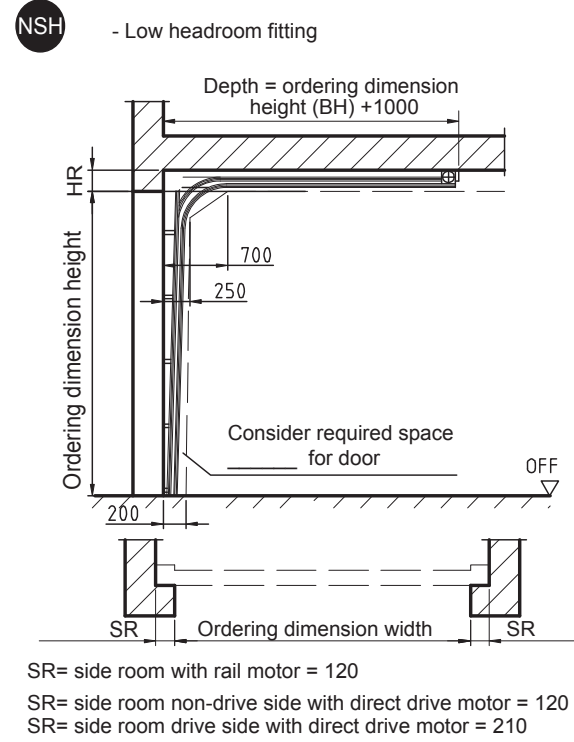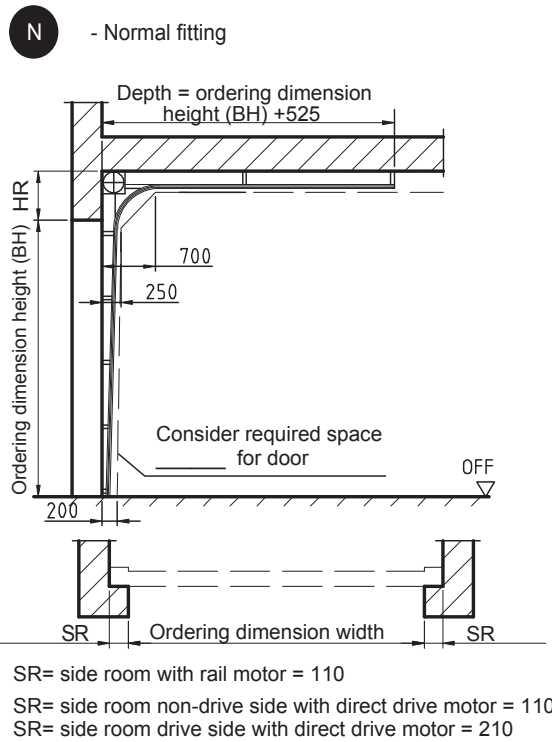

## HR HEADROOM REQUIREMENT

| Heights       |           | Widths        |                | 6000 | 6500 | 7000 | 7500 | 8000 |
|---------------|-----------|---------------|----------------|------|------|------|------|------|
| 4<br>Sections | 2250 7'4" | Rail Operator | Stand Headroom | 400  | 450  | -    | -    | -    |
|               |           |               | Low Headroom   | 280  | 280  | -    | -    | -    |
|               |           | Direct Drive  | Stand Headroom | 400  | 450  | 450  | 450  | 450  |
|               |           |               | Low Headroom   | 250  | 250  | 250  | 250  | 250  |
| 5<br>Sections | 2750 9'0" | Direct Drive  | Stand Headroom | 400  | 450  | 450  | 450  | 450  |
|               |           |               | Low Headroom   | 250  | 250  | 250  | 250  | 250  |
| 6<br>Sections | 3000 9'9" | Direct Drive  | Stand Headroom | 400  | 450  | 450  | 450  | 450  |
|               |           |               | Low Headroom   | 250  | 250  | 250  | 250  | 250  |

Max Width For Low Headroom = 7750  
280mm low headroom with rail operator is to prevent the top panel seal rubbing on the rail  
If this is not an issue then the door will fit in 250mm

## SPECIFICATION

**DOOR:**  
Sectional door double skinned PUR foam core, 40mm thick CarTeck panels. Outer surface finished in choice of 4 standard designs and all standard listed CarTeck colours. Inner surface stucco design, colour similar to RAL 9002. Sections have a centre seal; EPDM, header, and floor seals. Different order heights are made up from mixing panel sizes, 2 different bottom profile sizes and reduced top panel heights. Doors have reinforcing steel profiles on the rear of the panels.

**FRAME:**  
Door frame is made from hot dipped galvanised steel sections. Protective strips with EPDM sealing lips on both sides of the vertical tracks.

**HARDWARE:**  
Doors have galvanised frame legs and are supplied without a header strip. Hardware has galvanised finish, screwed hinges to all sections, adjustable rollers with ball bearings. Front or optional rear mounted torsion spring with load-bearing steel cables.

**AUTOMATION:**  
Electric 230V drive as standard, either direct or rail drive. Optical safety edge, hard wired to control system. Direct drive motor must have 16 amp supply direct to consumer unit. External release is not possible with direct drive motor, additional access must be available into garage.


**COLOURS**  
RAL references for colours are provided as a guide only to the nearest similar RAL colour. Colours will not match to other RAL finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL, BS or other colours will not be a precise match.  
The door panel, frames and window frame colour shade, and surface lustre will show some slight variation, this is due to different base materials and coating methods.

# POLYMER WINDOW OPTIONS

CARTECK SUPER SIZE SECTIONAL GARAGE DOORS GSW 40-L

## WINDOWS - POLYMER DOUBLE GLAZING

Windows construction: Polymer casement with polymer (Styrene Acrylonitrile) double glazed unit.

|                                                                                  | Style                        | Overall Size | Colour / Finish                |
|----------------------------------------------------------------------------------|------------------------------|--------------|--------------------------------|
|  | Rectangle 1                  | 610 X 270    | White<br>Trend/Ral/Wood design |
|  | Rectangle 2                  | 680 X 210    | White<br>Trend/Ral/Wood design |
|  | Rectangle 3                  | 980 X 140    | White<br>Trend/Ral/Wood design |
|  | Square 1 & 2                 | 270 x 270    | White<br>Trend/Ral/Wood design |
|  | GSA Aluminium Window Section | per linear m | White/Trend<br>Ral/Wood design |

### Polymer Windows

Selected Trend colours & wood design windows are finished in a complementary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Night Oak (RAL8014), Textured Anthracite (RAL7016) and Ice Crystal Grey Aluminium (RAL9007).

The surrounds on aluminium GSA window sections are finished in a smooth finish.

Window frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different.

Polymer glazing in Type 2 rectangle is 16mm thick. All other polymer glazing is 20mm thick.

All polymer windows are available with these glazing options:



Clear



Frosted



Satin

## SECTION 2:


## CARTECK SIDE HINGED GARAGE DOORS



# TECHNICAL CARTECK SIDE HINGED GARAGE DOORS GSW 40-L

## GEORGIAN DOORS

Horizontal doors have 2 columns of features as standard arranged 1/2 – 1/2, changing to an asymmetric three columns at the width shown below. 1/2 – 1/2 vertical doors have 2 rows of features as standard changing to three at the height shown right.

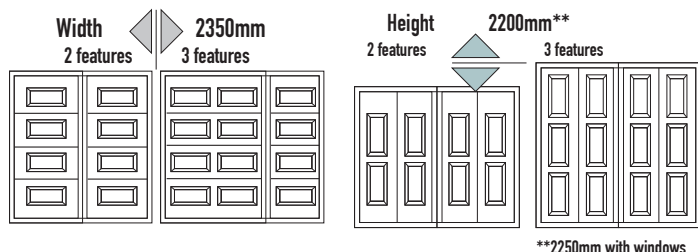

## SPECIFICATION

### DOOR:

Door leaves are fabricated using 40mm thick CarTeck panels with an extruded aluminium perimeter frame and integral seals. Doors with the optional standard threshold profile have an EPDM black threshold seal at the base. Each leaf is fitted with two or three (dependent on size) surface fixed hinges.

The door frame is an extruded aluminium profile with mitred corners and integral seals, for details refer to technical leaflet. A 3-part stepped aluminium threshold is also included. 10mm tolerance should be allowed to facilitate frame squaring during installation.

### HARDWARE:

Hardware comprises of a DIN standard CE marked European sashlock and a pair of stainless steel round bar lever handles on 50mm diameter roses. A Euro-profile cylinder and thumb turn with stainless steel escutcheons is included as standard (double cylinder, key both sides is available as an option if required). Two security keys are supplied with each cylinder. The inactive leaf is fitted with top and bottom recessed lever action flush bolts. A stay is fitted to each leaf to hold the door in the open position, any leaf below 780mm wide (including asymmetric side hinged doors) will not have a stay.

Stainless steel\*\* needs regular cleaning or will stain, especially in areas of high salt content.


### COLOUR:

The door frame and window frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different. Where differing materials and process are adopted, such as side hinged GSW 40L garage doors, there may be some colour matching variations. Differing light conditions may further reduce or highlight this effect. The colours RAL9006 and 9007 pose particular problems when colour matching, more information is available via the sales office.

RAL references for colours are provided as a guide only to the nearest similar RAL colour. Colours will not match to other RAL finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL, BS or other colours will not be a precise match.

\*\*For how to care for stainless steel see: [www.teckentrup.co.uk/garage-doors/frequently-asked-questions-faqs](http://www.teckentrup.co.uk/garage-doors/frequently-asked-questions-faqs)

## DIMENSIONS AND CLEARANCES

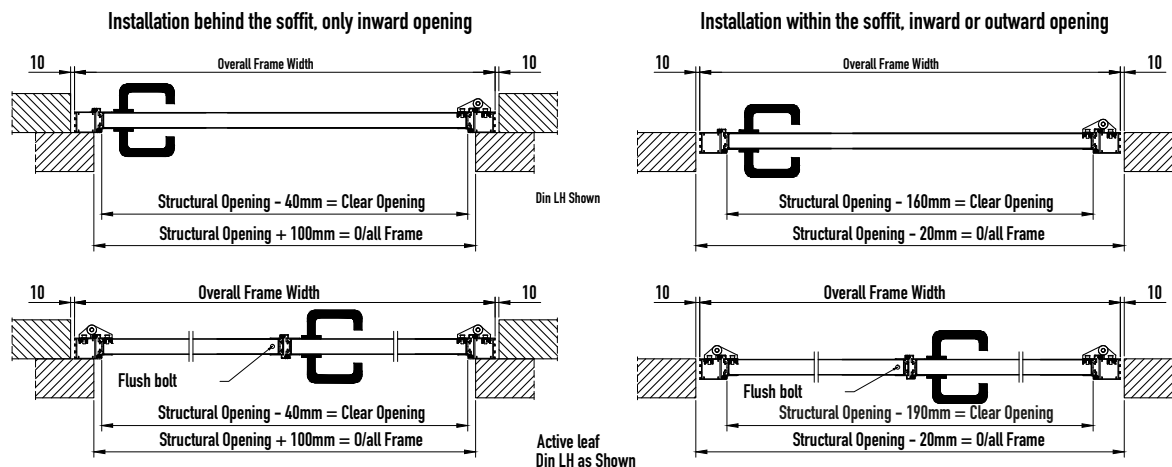


## CLEARANCES

### IMPORTANT

When doors are ordered as a structural opening size, Teckentrup UK will deduct 20mm from the width and 10mm from the height for coursing tolerance. If this is more tolerance than you wish, please state the over-frame dimension you require.



The section height and the height of the handle 'x' depend on the actual door height and construction of the door.

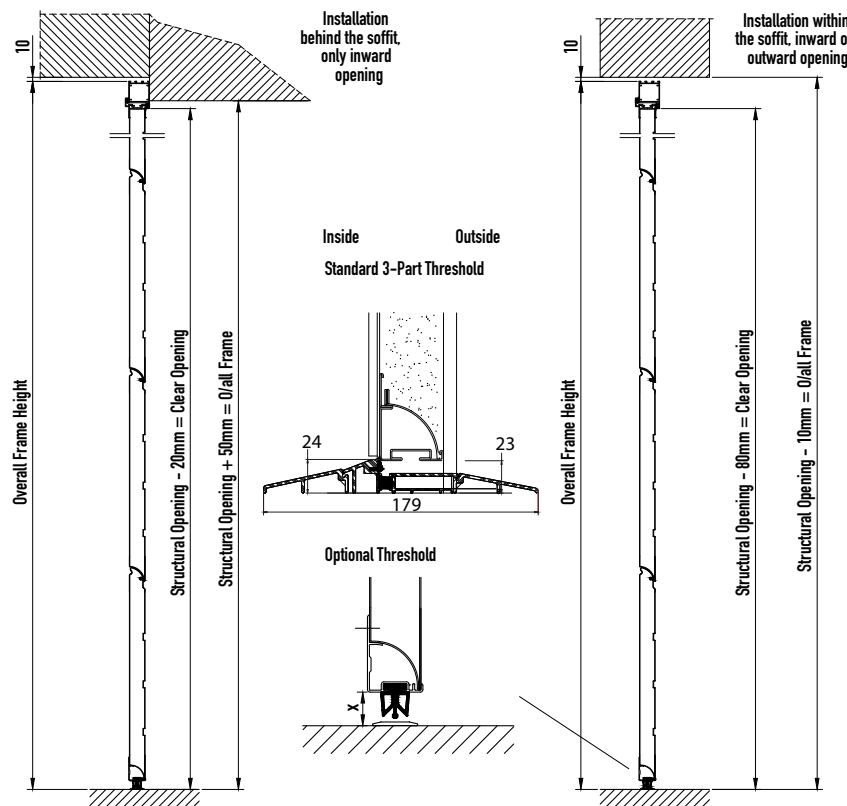

# POLYMER WINDOWS

CARTECK SIDE HINGED GARAGE DOORS GSW 40-L

## WINDOWS - POLYMER DOUBLE GLAZING

Windows construction: Polymer casement with polymer (Styrene Acrylonitrile) double glazed unit.

Georgian



1 Rectangle Plain    1 Rectangle Cross Mullion    1 Rectangle Rhombus

Standard Rib, Centre Rib & Solid



1 Rectangle Plain    1 Rectangle Cross Mullion    1 Rectangle Rhombus    Rectangle 2    Rectangle 3    Vertical Square 1    Vertical Square 2    GSA Aluminium

| Style                        | Overall Size | Colour / Finish                |
|------------------------------|--------------|--------------------------------|
| Rectangle 1                  | 610 X 270    | White                          |
| Rectangle 2                  | 680 X 210    | Trend/Ral/Wood design          |
| Rectangle 3                  | 980 X 140    | White                          |
| Rectangle 3                  |              | Trend/Ral/Wood design          |
| Square 1 & 2                 | 270 x 270    | White                          |
| Square 1 & 2                 |              | Trend/Ral/Wood design          |
| GSA Aluminium Window Section | per linear m | White/Trend<br>Ral/Wood design |

All polymer windows are available with these glazing options:



Clear



Frosted



Satin

### Polymer Windows

Selected Trend colours & wood design windows are finished in a complementary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Night Oak (RAL8014), Textured Anthracite (RAL7016) and Ice Crystal Grey Aluminium (RAL9007).

The surrounds on aluminium GSA window sections are finished in a smooth finish.

Window frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different.


# ALUMINIUM WINDOWS & DECALS

CARTECK SIDE HINGED GARAGE DOORS GSW 40-L


## ALUMINIUM WINDOWS - POLYMER DOUBLE GLAZING

Windows construction: Aluminium and polymer casement with polymer double glazed unit.


Alpha  
280mm x 280mm




Sigma  
610mm x 200mm




Zeta  
ø280mm




Gamma  
534mm x 344mm




Kappa  
1860mm x 180mm



Athena  
406mm x 203mm



Versus  
900mm x 1000mm



Satin



Clear


Minimum over frame height for Kappa windows used vertically on side hinged doors: 2010mm

All aluminium windows are available with these glazing options (satin is supplied as standard).


## ALUNOX DECALS

Factory bonded alunox decals. Decals can be positioned to requested positions, however, popular arrangements are shown here.


Access 1  
431mm x 40mm




Access 2  
430mm x 40mm




Access 3  
215mm x 40mm




Access 4  
400mm x 86mm




Access 5  
180mm x 180mm




Access 6  
70mm x 70mm




Access 7  
150mm x 150mm




Access 8  
194 mm x 194 mm




Access 9  
436mm x 40mm



Access 10  
431mm x 13mm



Writing  
100mm    200mm



Coach House Mock Hinges  
277mm x 81mm



## EXTRA OPTIONS

### EXTRA TOUCHES



PET FLAP

\*Customer supplied



CODE LOCK

SPY HOLE



LETTER box






## SECTION 3:

# TECKENTRUP 62 SWING SECURE GARAGE DOORS




# TECHNICAL TECKENTRUP 62 SWING SECURE


## ORDERING SIZE

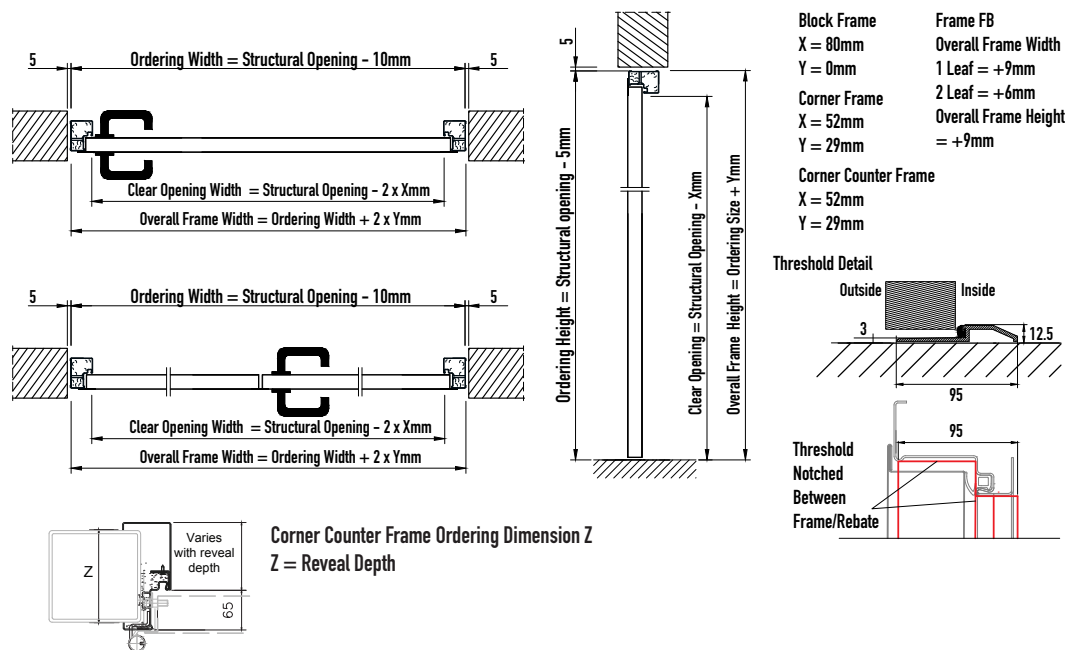


## TECKENTRUP 62 1/2 SWING SECURE BLOCK FRAME (CLASSIC)

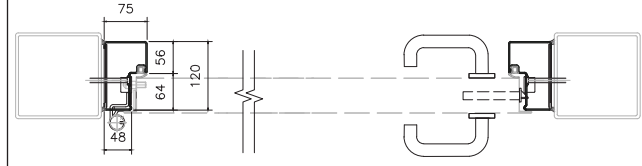


## BLOCK FRAME FB DETAIL




## TECKENTRUP 62 1/2 SWING SECURE CORNER FRAME (WRAP)

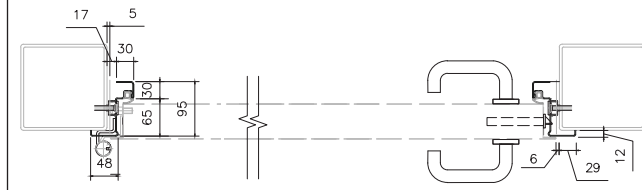


## CORNER FRAME FB DETAIL



## TECKENTRUP 62 1/2 SWING SECURE CORNER COUNTER FRAME (WRAP)

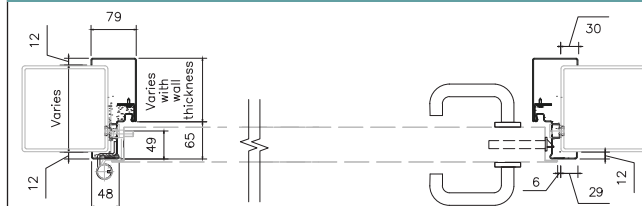

## CORNER COUNTER FRAME FB DETAIL



## SPECIFICATION

### DOOR:

Double skinned, thin rebated on 3 sides 1mm galvanised steel door leaf 62mm thick filled with insulating mineral wool, polyester powder coated with 1 security bolt per leaf.

### FRAME:

Door frame is made from 2mm thick galvanised steel, wrap frame filled with foam on site, classic block frame factory filled with mineral wool. 3 sided EPDM seal push fitted into frame on installation. Aluminium rebated threshold.

### HARDWARE:

2 bearing KO hinges per door leaf, DIN standard mortice lock with stainless steel lever handles and protective cylinder guard. Euro profile security cylinder and thumb turn with 2no. restricted keys. Foot operated door stays and top and bottom lever action flush bolts on double doors. Rain-Guard in anodised aluminium (Not colour Matched). To ensure the security of product when glazing elements added to the door the door will be supplied with a key-key cylinder.

### AUTOMATION:


Door is not suited for automation.

### COLOUR:


RAL references for colours are provided as a guide only to the nearest similar RAL colour. Colours will not match to other RAL finishes due to different coating processes, gloss levels, substrates and textures. Similarly, special RAL, BS or other colours will not be a precise match.

## WINDOWS - CARTECK SWING SECURE STANDARD WINDOW POSITIONS


### 1 window

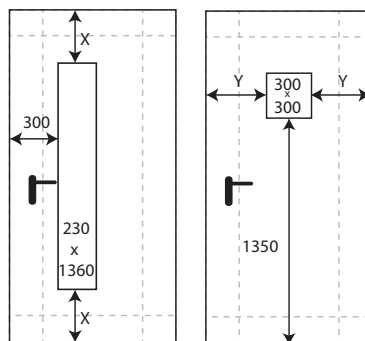

### 2 windows




### 3 windows




## CARTECK SWING SECURE D-HANDLE POSITIONS

### 1200mm



### 1500mm




# LAMINATED WINDOWS & DECALS

TECKENTRUP 62 SWING SECURE

## WINDOWS

Windows construction: Anodised Aluminium surrounds with laminated glass in clear or satin.



TALL 1360 V1



TALL 1360 V2



Square 300 S



Square 300 SP



Square 300 S2



Square 300 S2P



Square 300 S3



Square 300 S3P

### Size

230mm x 1360mm

300mm x 300mm


300mm Round

Doors with windows are supplied with a lock cylinder that can only be operated by key from outside and inside to maintain security. Should a glazing element be breached in an attempt to enter, the door cannot be opened (an internal thumb turn is not available).


## ALUNOX DECALS

Factory bonded alunox decals. Decals can be positioned to requested positions, however, popular arrangements are shown here.


Access 1  
431mm x 40mm



Access 2  
430mm x 40mm




Access 3  
215mm x 40mm




Access 4  
400mm x 86mm




Access 5  
180mm x 180mm




Access 6  
70mm x 70mm




Access 7  
150mm x 150mm




Access 8  
194 mm x 194 mm




Access 9  
436mm x 40mm




Access 10  
431mm x 13mm



Writing  
100mm 200mm



Coach House Mock Hinges  
277mm x 81mm




Teckentrup is a family business with operations throughout the world. In the UK Teckentrup is based in Warrington, Cheshire. Teckentrup products are available through a national network of independent Garage Door Specialist installers.

Teckentrup offers more than garage doors: We provide solutions and have set three quality standards for our garage doors:

# Design.

# Security.

# Service.



## Design

**We combine ease of use with aesthetics.**

Good design uses innovative technology to make using a product intuitive and effortless. Teckentrup garage doors offer a wide range of design options that will transform the look of your home and the way you use your garage space.



## Safety & Security

**We combine security with safety.**

Our products are designed to provide peace of mind with both physical security and the knowledge that durability and safe operation are inherent.



## Service

**We combine speed with reliability.**

The Teckentrup team and our network of Garage Door Specialist installers love to make your new door a pleasure to own. From planning to installation. You'll always receive expert advice and the best service for installation, maintenance and aftercare.

## Quality & Environment

Teckentrup operates to quality procedures audited to ISO 9001.

We care about the environment too - this is why our products are certified in accordance with the Environmental Product Declaration (EPD).

ISO 14001 Environmental Management  
 ISO 50001 Energy Management



### DGNB

Deutsche Gesellschaft für Nachhaltiges Bauen e. V. German Sustainable Building Council

### BNB

Bewertungssystem Nachhaltiges Bauen - Evaluation system for sustainable building

### LEED

Leadership in Energy and Environmental Design

### BREEAM

Building Research Establishment Environmental Assessment Methodology



Teckentrup UK Limited,  
 Units 2-4 Opus 9 Industrial Estate,  
 Woburn Road, Winwick Quay Warrington WA2 8UE

**www.teckentrup.co.uk**

**t: 01925 924 050**

**f: 08701 314 843**

**e: sales@teckentrup.co.uk**



Raising Standards  
 Safety Assured

Member



Accredited Contractor

